UNITED NATIONS CONVENTION
ON THE LAW OF THE SEA

CLCS

COMMISSION ON THE LIMITS
OF THE CONTINENTAL SHELF

Distr.
LIMITED

CLCS/L.6
4 September 1998

ORIGINAL: ENGLISH

Fourth session
New York, 31 August-4 September 1998

PROVISIONAL SCIENTIFIC AND TECHNICAL GUIDELINES OF THE COMMISSION ON THE LIMITS OF THE CONTINENTAL SHELF

Adopted by the Commission provisionally and to be applied provisionally pending the final formal adoption by the Commission at its fifth session

CONTENTS

	Page
PREFACE	4
1. Introduction	7
2. Entitlement to an extended continental shelf and the delineation of its outer limits	9
2.1 Formulation of the problem: article 76	9
2.2 Test of appurtenance	12
2.3 Delineation of the outer limits of the continental shelf	13
3. Geodetic methodologies and the outer limits of the continental shelf	19
3.1 Formulation of the problem: paragraphs 1, 4, 5 and 7	19
3.2 Units, geodetic reference systems and coordinate transformations	20
3.3 Geodetic definition of baselines	23
3.4 Outer limits and their confidence zones	25

98-31462 (E) 301198

/...

CONTENTS (continued)

Page

4. The 2,500 metre isobath 28

4.1 Formulation of the problem: paragraph 5 28

4.2 Sources of data and hydrographic measurements 28

4.3 Bathymetric model 30

4.4 Selection of points for the delineation of the 100 M limit ... 31

5. Foot of the continental slope determined as the point of maximum change in the gradient at its base 32

5.1 Formulation of the problem: paragraph 4 32

5.2 Sources of data 33

5.3 Filtering and smoothing 34

5.4 Delineation of the foot of the continental slope 35

6. Foot of the continental slope determined by means of evidence to the contrary 37

6.1 Formulation of the problem: paragraph 4 (b) 37

6.2 Geological and geophysical evidence 39

6.3 Determination of the [limits of the] continental margins 41

6.4 Considerations to be given with respect to "evidence to the contrary" 43

7. Ridges 46

7.1 Formulation of the problem: paragraphs 3 and 6 46

7.2 Oceanic ridges and submarine ridges 47

7.3 Submarine elevations 49

8. Delineation of the outer limits of the continental shelf based on sediment thickness 50

8.1 Formulation of the problem: paragraph 4 (a) (i) 50

8.2 Relevant geophysical techniques and data 51

CONTENTS (continued)

		Page
8.3	Depth conversion and thickness determination	56
8.4	Sources and magnitudes of error	59
8.5	Selection of outermost fixed points of 1 per cent sediment thickness	60
9.	Information on the limits of the extended continental shelf	64
9.1	Formulation of the problem: paragraph 8 and Annex II	64
9.2	Bathymetric and geodetic data	65
9.3	Geophysical and geological data	67
9.4	Digital and non-digital data	69
9.5	Checklist of relevant supporting information and data	71
10.	References and bibliography	76
Annex.	List of international organizations	81

Preface

The preparation of the Scientific and Technical Guidelines of the Commission on the Limits of the Continental Shelf was conducted in two stages. The first stage consisted of background research conducted along disciplinary and interdisciplinary lines. The Commission organized six research groups for this purpose:

(a) Hydrography (Srinivasan, Chairman; Albuquerque, Astiz, Carrera, Francis and Lamont, with Rio as an alternate);

(b) Geodesy (Carrera, Chairman; Albuquerque, Astiz, Brekke, Francis, Hamuro, Jaafar, Mdala and Srinivasan, with Rio as an alternate);

(c) Geology (Park, Chairman; Betah, Brekke, Hamuro, Juracic, Kazmin, Lu, Mdala and Srinivasan, with Carrera as an alternate);

(d) Geophysics (Croker, Chairman; Awosika, Carrera, Hinz, Lu, Mdala and Park, with Francis as an alternate);

(e) Foot of the continental slope (Rio, Chairman; Carrera, Francis, Hamuro, Kazmin, Lamont, Rio and Srinivasan);

(f) Outer edge of the continental margin (Brekke, Chairman; Albuquerque, Astiz, Betah, Carrera, Croker, Hamuro, Juracic, Kazmin, Lu, Mdala and Park).

The second stage consisted of the preparation of draft Guidelines, which began at the third session of the Commission, held at United Nations Headquarters in New York from 4 to 15 May 1998. An Editorial Committee was established at the session and Galo Carrera was elected as its Chairman. The Editorial Committee considered and adopted the document structure for the Guidelines proposed by its Chairman.

The Editorial Committee was organized into 13 working groups, whose Chairmen reported to the Chairman of the Editorial Committee, as follows:

(1) Introduction (Carrera, Chairman; Editorial Committee);

(2) Entitlement to and delineation of the outer limits of the continental shelf (Carrera, Chairman; Albuquerque, Brekke, Hamuro, Hinz, Lamont and Rio);

(3) Geodetic methodologies and the outer limits of the continental shelf (Carrera, Chairman; Albuquerque, Astiz, Brekke, Francis, Hamuro, Jaafar, Mdala, Rio and Srinivasan);

(4) The 2,500 m isobath (Lamont, Chairman; Albuquerque, Astiz, Awosika, Carrera, Francis, Hinz, Rio and Srinivasan);

(5) Foot of the slope determined as the point of maximum change in the gradient at its base (Rio, Chairman; Albuquerque, Astiz, Carrera, Croker, Francis, Hamuro and Lamont);

(6) Foot of the continental slope determined by means of evidence to the contrary (Hinz, Chairman; Betah, Jaafar, Juracic, Kazmin and Park);

(7) Ridges (Hamuro, Chairman; Brekke, Hinz, Juracic, Kazmin, Lu and Park);

(8) Delineation of the outer limits of the continental shelf based on sediment thickness (Brekke, Chairman; Awosika, Croker, Juracic and Park);

(9) Information on the outer limits of the extended continental shelf (Albuquerque, Chairman; Brekke, Carrera, Hamuro, Hinz, Lamont and Rio);

(10) References and bibliography (Carrera, Chairman; Editorial Committee);

(11) List of international organizations (Carrera, Chairman; Editorial Committee);

(12) Flowcharts, tables and illustrations summarizing the procedure for establishing the outer limits of the continental shelf (Jaafar and Chan Chim Yuk);

(13) Oversight (Awosika, Chairman; Astiz, Beltagy and Hamuro).

The Editorial Committee assigned to the first 12 working groups the task of preparing 10 chapters and 2 annexes. The oversight working group was entrusted with two assignments: it was first asked to identify the totality of issues raised in the studies prepared by the Division for Ocean Affairs and the Law of the Sea on the basis of discussions held during two meetings of groups of experts in 1993 and 1995. Secondly, it was requested to determine whether those issues were addressed in the Guidelines. The 12 drafting groups produced a preliminary outline draft of the Guidelines, which was discussed during the last plenary meeting of the Editorial Committee held during the third session of the Commission.

All working groups conducted their main drafting efforts during the inter-session period of 1998. On 20 July 1998, the revised version of the draft Guidelines was submitted to the Chairman of the Editorial Committee, who proceeded to edit them for consistency in content and style.

The Editorial Committee reconvened at the fourth session of the Commission held at United Nations Headquarters from 31 August to 4 September 1998. The draft of the Guidelines edited by the Chairman of the Editorial Committee was discussed during various plenary meetings of the Editorial Committee, where amendments and clarifications were introduced in an iterative revision process. The oversight group then proceeded to prepare its report based on the final draft produced by the Editorial Committee at that session.

The Chairman of the Editorial Committee submitted the final draft Guidelines to the Commission at large for consideration during the last meeting of its fourth session. The Commission, in turn, considered them and agreed to adopt them provisionally. The Commission also agreed to make them available to States on 4 September 1998 as a document in the "L" (limited distribution) series.

The Guidelines will be discussed again at the fifth session of the Commission, to be held at United Nations Headquarters from 3 to 14 May 1999, where they will be adopted in their final form.

The drafting of the Scientific and Technical Guidelines of the Commission on the Limits of the Continental Shelf during a period of only four months represents an important achievement towards the implementation of article 76 of the United Nations Convention on the Law of the Sea. This accomplishment demonstrates the ability of the Commission to work efficiently and effectively on a project that required considerable expertise on a number of scientific and technical disciplines.

The Guidelines, which the Commission adopted provisionally by consensus, serve multiple purposes: they are primarily intended to assist coastal States in preparing their submissions. They are also designed to provide an important scientific and technical reference for the consideration of these submissions and the preparation of the Commission's own recommendations. And last but not least, they form the basis on which the Commission shall provide advice, if requested by coastal States during the preparation of their necessary data.

The members of the Commission have an obligation to perform their duties honourably, faithfully, impartially and conscientiously. These principles, which form the essence of their solemn declaration, have guided them in the preparation of their Scientific and Technical Guidelines.

Editorial Committee,
Commission on the Limits of the Continental Shelf.

United Nations Headquarters, New York.
4 September 1998.

1. Introduction

The Commission on the Limits of the Continental Shelf recognizes the integral character of the United Nations Convention on the Law of the Sea (the Convention). These Scientific and Technical Guidelines form the basis for the Commission to make its recommendations with respect to submissions prepared by States according to article 76 and Annex II of the Convention in a manner that is consistent with the Convention and international law.

The Commission prepared these Guidelines for the purpose of providing direction to coastal States which intend to submit data and other material concerning the outer limits of the continental shelf in areas where those limits extend beyond 200 nautical miles from the baselines from which the breadth of the territorial sea is measured. The Guidelines aim to clarify the scope and depth of admissible scientific and technical evidence to be examined by the Commission during its consideration of each submission for the purpose of making recommendations.

With these Guidelines, the Commission aims also to clarify its interpretation of relevant scientific, technical and legal terms contained in the Convention. Clarification is required in particular because the Convention makes use of scientific terms in a legal context which at times departs significantly from accepted scientific definitions and terminology. In other cases, clarification is required because various terms in the Convention might be left open to several possible and equally acceptable interpretations. It is also possible that it may not have been felt necessary at the time of the Third United Nations Conference on the Law of the Sea to determine the precise definition of various scientific and technical terms. Still, in other cases, the need for clarification arises as a result of the complexity of several provisions and the potential scientific and technical difficulties which might be encountered by States in making a single and unequivocal interpretation of each of them.

The Commission designed these Guidelines with a view to ensuring a uniform and extended State practice during the preparation of scientific and technical evidence submitted by coastal States. Whereas several scientific and technical avenues are available to develop an admissible body of evidence which may conform equally to all the relevant provisions contained in the Convention, the Commission has endeavoured to emphasize those which might minimize cost and result in the optimization of existing information and resources.

The scientific nature and the order of the paragraphs contained in article 76 define the structure of the Guidelines. Each chapter starts with a formulation of the problem posed by each of its provisions followed by an in-depth discussion of its implementation. Chapter 2 presents an overview of questions relating to the entitlement to an extended continental shelf and the delineation of its outer limits. Chapter 3 reviews units and describes the geodetic methodology used to determine outer limits based on metrics. Chapter 4 describes the hydrographic methodology used to determine the 2,500 metre isobath and other geomorphologic features. Chapter 5 discusses the determination of the location of the foot of the continental slope as the point of maximum change in gradient at its base. Chapter 6 examines the case in which evidence to the

contrary might be presented as an alternative to the methodology described in chapter 5 to determine the location of the foot of the continental slope. Chapter 7 discusses the classification and treatment of oceanic and submarine ridges, and other submarine elevations. Chapter 8 discusses the geophysical methodology applied for the determination of sediment thickness and its error estimates. Chapter 9 describes the data and other material to be included in a submission regarding the outer limits of the continental shelf.

The Commission recognizes that the Convention poses in-depth requirements in several scientific disciplines and also poses the need for interdisciplinary scientific and technical cooperation for the preparation of data and materials in each submission. These Guidelines are not aimed at describing in detail the scientific theories or precise technical methodologies involved in each discipline. For that purpose, experts assigned to the preparation of submissions are advised to consult the contributions made by many scientific and technical, governmental and non-governmental organizations and disseminated through journals, conference proceedings and other publications.

The annex provides a non-exhaustive list of international scientific and technical organizations whose data and information might be of interest to States which intend to prepare a submission. Whereas those international organizations have the primary responsibility to promote the development of knowledge and research in their respective disciplines, the Commission has the sole responsibility to make recommendations and to provide scientific and technical advice in relation to submissions on the limits of extended continental shelves made by coastal States according to article 76 of and Annex II to the United Nations Convention on the Law of the Sea.

2. Entitlement to an extended continental shelf and the delineation of its outer limits

2.1. Formulation of the problem: article 76

2.2. Test of appurtenance

2.3. Delineation of the outer limits of the continental shelf

2.1. Formulation of the problem: article 76

Article 76, paragraph 1, establishes the right of coastal States to determine the outer limits of the continental shelf by means of two criteria based on either natural prolongation or distance:

> "The continental shelf of a coastal State comprises the sea-bed and subsoil of the submarine areas that extend beyond its territorial sea throughout the natural prolongation of its land territory to the outer edge of the continental margin, or to a distance of 200 nautical miles from the baselines from which the breadth of the territorial sea is measured where the outer edge of the continental margin does not extend up to that distance."

Paragraph 4 (a) suggests the formulation of a test of appurtenance in order to entitle a coastal State to extend the outer limits of the continental shelf beyond the limit set by the 200-nautical-mile distance criterion. This test consists in the demonstration of the fact that the natural prolongation of its land territory to the outer edge of the continental margin extends beyond a line delineated at a distance of 200 nautical miles from the baselines from which the breadth of the territorial sea is measured.

> "For the purposes of this Convention, the coastal State shall establish the outer edge of the continental margin wherever the margin extends beyond 200 nautical miles from the baselines from which the breadth of the territorial sea is measured,".

The Convention offers two complementary provisions designed to provide the definition of the continental margin and the breadth of its outer limit. The first provision, contained in paragraph 3, provides its definition:

> "The continental margin comprises the submerged prolongation of the land mass of the coastal State, and consists of the sea-bed and subsoil of the shelf, the slope and the rise. It does not include the deep ocean floor with its oceanic ridges or the subsoil thereof."

The second, contained in paragraph 4 (a) (i) and (ii), subject to paragraphs 5 and 6, determines the position of the outer limit of the continental margin by means of a complex formula based on four rules. Two of these rules are affirmative and the remaining two are negative. The two positive rules, herein referred to as formulae, are connected through an inclusive disjunction:

"(i) a line delineated in accordance with paragraph 7 by reference to the outermost fixed points at each of which the thickness of sedimentary rocks is at least 1 per cent of the shortest distance from such point to the foot of the continental slope; or

"(ii) a line delineated in accordance with paragraph 7 by reference to fixed points not more than 60 nautical miles from the foot of the slope."

The use of an inclusive disjunction as a connective between the two formulae implies that the compound is true so long as at least one of the components is true. Thus, the limit of the continental shelf can be extended up to a 1 per cent sediment thickness line delineated by reference to fixed points, or to a line delineated by reference to fixed points at a distance of 60 nautical miles from the foot of the continental slope, or both.

When both formulae lines are used, their outer envelope determines the maximum potential extent of entitlement over the continental shelf by a coastal State. This envelope forms the basis of a claim but it is still subject to spatial constraints in order to produce the delineation of the outer limits of the continental shelf.

The extent of the outer envelope formed by the lines derived from the two formulae is restricted by a line derived from the two negative rules, herein referred to as constraints, which are connected by another inclusive disjunction. According to paragraph 5, the simultaneous application of the these two constraints defines the outer limit beyond which an extended claim cannot be made:

"The fixed points comprising the line of the outer limits of the continental shelf on the sea-bed, drawn in accordance with paragraph 4 (a) (i) and (ii), either shall not exceed 350 nautical miles from the baselines from which the breadth of the territorial sea is measured or shall not exceed 100 nautical miles from the 2,500 metre isobath, which is a line connecting the depth of 2,500 metres."

The application of a negation over each of the two components connected by an inclusive disjunction implies that the compound is true so long as at least one of the constraints is satisfied. Thus, the outer limits of the continental shelf can extend either beyond a line delineated by reference to fixed points at a distance of 350 nautical miles from baselines from which the breadth of the territorial sea is measured, or beyond a line delineated by reference to fixed points at a distance of 100 nautical miles from the 2,500 m isobath, but not both.

In practice, the use of an inclusive disjunction means that the outer envelope of the constraint lines identifies the breadth beyond which the outer limits of the continental shelf of a coastal State cannot extend. This outer envelope of the constraints does not provide per se the basis for entitlement to an extended continental shelf. It is solely a constraint placed over the envelope line produced by the formulae in order to delineate the outer limits of the continental shelf.

Submarine ridges constitute a special case which is subject to the rules of entitlement given by paragraph 4 (a) (i) and (ii), but it is also subject to the more stringent constraint provided by paragraph 6:

> "Notwithstanding the provisions of paragraph 5, on submarine ridges, the outer limit of the continental shelf shall not exceed 350 nautical miles from the baselines from which the breadth of the territorial sea is measured. This paragraph does not apply to submarine elevations that are the natural components of the continental margin, such as its plateaux, rises, caps, banks, and spurs."

Submarine elevations are exempted from the provisions applied to submarine ridges. They are subject instead to the constraints provided in paragraph 5.

Pursuant to the above provisions, paragraph 4 (b) provides a dual regime for the identification of the foot of the slope based on either geomorphological and bathometric evidence or an additional source of evidence:

> "In the absence of evidence to the contrary, the foot of the continental slope shall be determined as the point of maximum change in the gradient at its base."

Whereas the point of maximum change in the gradient at its base identifies the position of the foot of the continental slope as a general rule, the Commission is bound by this provision to examine all additional evidence provided by a coastal State for the identification of alternative points to locate the foot of the continental slope.

As a summary, where the natural prolongation of a coastal State to the outer edge of the continental margin extends beyond 200 nautical miles from the baselines from which the breadth of the territorial sea is measured, the outer limits of the continental shelf can be extended up to a 1 per cent sediment thickness line, or to a line delineated at a distance of 60 nautical miles from the foot of the slope, and no further than a line delineated at a distance of 350 nautical miles from baselines from which the breadth of the territorial sea is measured, or no further than a line delineated at a distance of 100 nautical miles from the 2,500 m isobath.

The use of a conjunction as a connective between the two components formed, in turn, by a formula compound and a constraint compound, implies that the full compound is true only so long as both components are true. Thus, at least one of the formulae and one of the constraints must be satisfied at all times.

In practice, the use of a conjunction means that the outer limit of the continental shelf is delineated by the inner envelope of two lines: the outer envelope of the formulae, and the outer envelope of the constraints. Section 2.3 illustrates the methodology used to combine these envelopes.

2.2. Test of appurtenance

Both the basis for entitlement to delineate the outer limits of an extended continental shelf and the methods to be applied in this delineation are embedded in article 76. However, it is clear that the positive proof of the first precedes the implementation of the second.

The test of appurtenance is designed to determine the legal entitlement of a coastal State to delineate the outer limits of the continental shelf throughout the natural prolongation of its land territory to the outer edge of the continental margin, or to a distance of 200 nautical miles from the baselines from which the breadth of the territorial sea is measured.

If a State is able to demonstrate to the Commission that the natural prolongation of its submerged land territory to the outer edge of its continental margin extends beyond the 200-nautical-mile distance criterion, the outer limit of its continental shelf can be delineated by means of the application of the complex set of rules described in paragraphs 4 to 10.

If, on the other hand, a State does not demonstrate to the Commission that the natural prolongation of its submerged land territory to the outer edge of its continental margin extends beyond the 200-nautical-mile distance criterion, the outer limit of its continental shelf is automatically delineated up to that distance as prescribed in paragraph 1. In this case, coastal States do not have an obligation to submit information on the limits of the continental shelf to the Commission, nor is the Commission entitled by the Convention to make recommendations on these limits.

The Commission finds that proof of entitlement over the continental shelf and the method of delineation of the outer limits of the continental shelf are two distinct but complementary questions. The basis for delineation cannot be other than pertinent to that of entitlement itself.

The Commission shall use at all times: the provisions contained in paragraph 4 (a) (i) and (ii), defined as the formulae lines, and paragraph 4 (b), to determine whether a coastal State is entitled to delineate the outer limits of the continental shelf beyond 200 nautical miles. The Commission shall accept that a State is entitled to use all the other provisions contained in paragraphs 4 to 10 provided that the application of either of the two formulae produces a line beyond 200 nautical miles.

The Commission finds multiple justifications for the application of the formulae rules in the test of appurtenance:

- The geological and geomorphological provisions contained in paragraph 3 are satisfied as a result of this choice;

- The application of any other criteria would be inconsistent with the provisions contained in the Convention for the delineation of the outer limits of the continental shelf;

- The application of other rules would have set a legal precedent not contained in the Convention, and perhaps also created unnecessary uncertainties and the burden of additional time and expense on States; and

- The Commission is not precluded by the Convention from making this selection of rules.

The formulation of the test of appurtenance can be described as follows:

If either the line delineated at a distance of 60 nautical miles from the foot of the slope, or the line delineated at a distance where the thickness of sedimentary rocks is at least 1 per cent of the shortest distance from such point to the foot of the slope, or both, extend beyond 200 nautical miles from the baselines from which the breadth of the territorial sea is measured, then a coastal State is entitled to delineate the outer limits of the continental shelf as prescribed by the provisions contained in article 76, paragraphs 4 to 10.

If the test of appurtenance is satisfied, a coastal State has an obligation to submit information on the limits of the continental shelf to the Commission, according to paragraph 8:

"Information on the limits of the continental shelf beyond 200 nautical miles from the baselines from which the breadth of the territorial sea is measured shall be submitted by the coastal State to the Commission on the Limits of the Continental Shelf set up under Annex II on the basis of geographical representation. The Commission shall make recommendations to coastal States on matters related to the establishment of the outer limits of their continental shelf. The limits of the shelf established by a coastal State on the basis of these recommendations shall be final and binding."

2.3. Delineation of the outer limits of the continental shelf

Article 76 contains a complex combination of four rules, two formulae and two constraints, based on concepts of geodesy, geology, geophysics and hydrography:

Formulae

- A line delineated in accordance with paragraph 7 by reference to the outermost fixed points at each of which the thickness of sedimentary rocks is at least 1 per cent of the shortest distance from such point to the foot of the continental slope; and

- A line delineated in accordance with paragraph 7 by reference to fixed points not more than 60 nautical miles from the foot of the slope.

Constraints

- A line delineated by reference to fixed points at a distance of 350 nautical miles from the baselines from which the breadth of the territorial sea is measured; and

- A line delineated by reference to fixed points at a distance of 100 nautical miles from the 2,500 metre isobath.

Whereas the application of at least one of the two formulae beyond 200 nautical miles suffices to provide the basis for entitlement to delineate the outer limits of an extended continental shelf, the simultaneous application of all four rules is necessary in order to actually delineate the outer limits of the continental shelf.

Once the outer limits of the four rules included in article 76 are determined, the delineation of the outer limit of the extended continental shelf can be summarized as a three-step process:

(i) The two limits computed by the application of each of the affirmative rules are used to create their outer envelope or formulae line;

(ii) The two limits computed by the application of each of the negative rules are used to create their outer envelope or constraint line; and

(iii) The inner envelope of the formulae and constraint lines described above determines the outer limit of the extended continental shelf.

In the special case of submarine ridges, the constraint line created in step (ii) above is formed only by the 350 M limit.

Article 76, paragraph 7, describes the geometric character of the outer limit of the continental shelf:

> "The coastal State shall delineate the outer limits of its continental shelf, where that shelf extends beyond 200 nautical miles from the baselines from which the breadth of the territorial sea is measured, by straight lines not exceeding 60 nautical miles in length, connecting fixed points, defined by coordinates of latitude and longitude."

This provision does not specify explicitly the geometric definition of these straight lines. Several line definitions could be conceivably adopted. These could be, among others, loxodromes, normal sections from either end point of a segment, or great circles. The Commission acknowledges that this provision implements a new norm of international law and that there is no precedent or State practice which might suggest the existence of a uniform and extended application of a particular geodetic methodology for this particular purpose.

In view of the rigorous geometric definition of a straight line as the line of shortest distance between two points, the Commission will employ geodesics on

the surface of the official geodetic reference ellipsoid used by a State in each submission to define the path and distances of these specific straight lines. This decision is adopted without prejudice to, and is independent from, the interpretation made by the Commission with respect to straight lines as prescribed under the provisions of article 7 and as discussed in section 3.3 of these Guidelines.

[These straight lines are designed to connect fixed points on the outer limits of the continental shelf at distances not exceeding 60 m. In the case of straight lines connecting fixed points at each of which the thickness of sedimentary rocks is at least 1 per cent of the shortest distance from such points to the foot of the continental slope, only adjacent points will be connected. In the case of straight lines connecting fixed points located on arcs at a distance of not more than 60 M from the foot of the continental slope, only adjacent points located either on the same arc or on two intersecting arcs will be connected. In the case of straight lines connecting fixed points located on arcs at a distance of not more than 100 M from the 2,500 metre isobath, only adjacent points located either on the same arc or on two intersecting arcs will be connected. In the case of straight lines connecting fixed points located on arcs at a distance not exceeding 350 M from the baselines from which the breadth of the territorial sea is measured, only adjacent points located either on the same arc or on two adjacent and intersecting arcs will be connected. Coastal States will not connect fixed points located on non-intersecting arcs by means of straight lines.][1]

The Commission acknowledges that the character of the limits established by a coastal State based on its recommendations, according to paragraph 8, is final and binding, and that, according to paragraph 2, coastal States shall not extend the outer limits of their continental shelf beyond these limits:

> "The continental shelf of a coastal State shall not extend beyond the limits provided for in paragraphs 4 to 6."

---

[1] Text contained in square brackets will be discussed further in the Commission.

Figure 2.1.Delineation of the formulae line

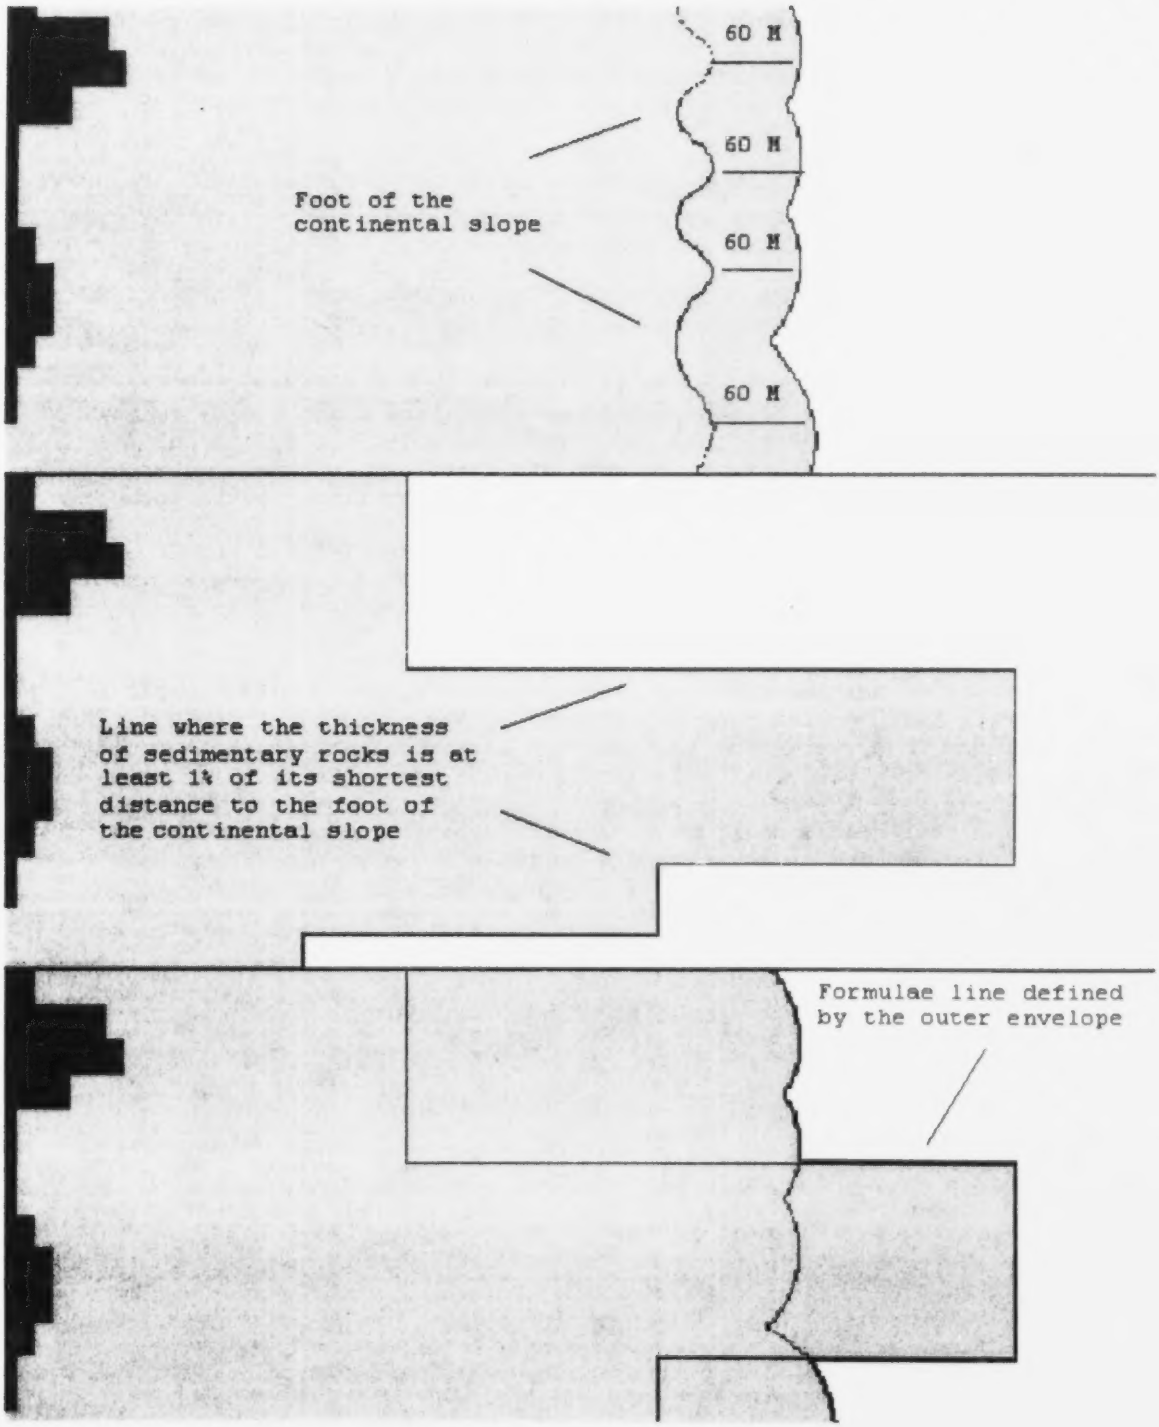
60 M
60 M
60 M
60 M
Foot of the continental slope
Line where the thickness of sedimentary rocks is at least 1% of its shortest distance to the foot of the continental slope
Formulae line defined by the outer envelope

Figure 2.2. Delineation of the constraint line

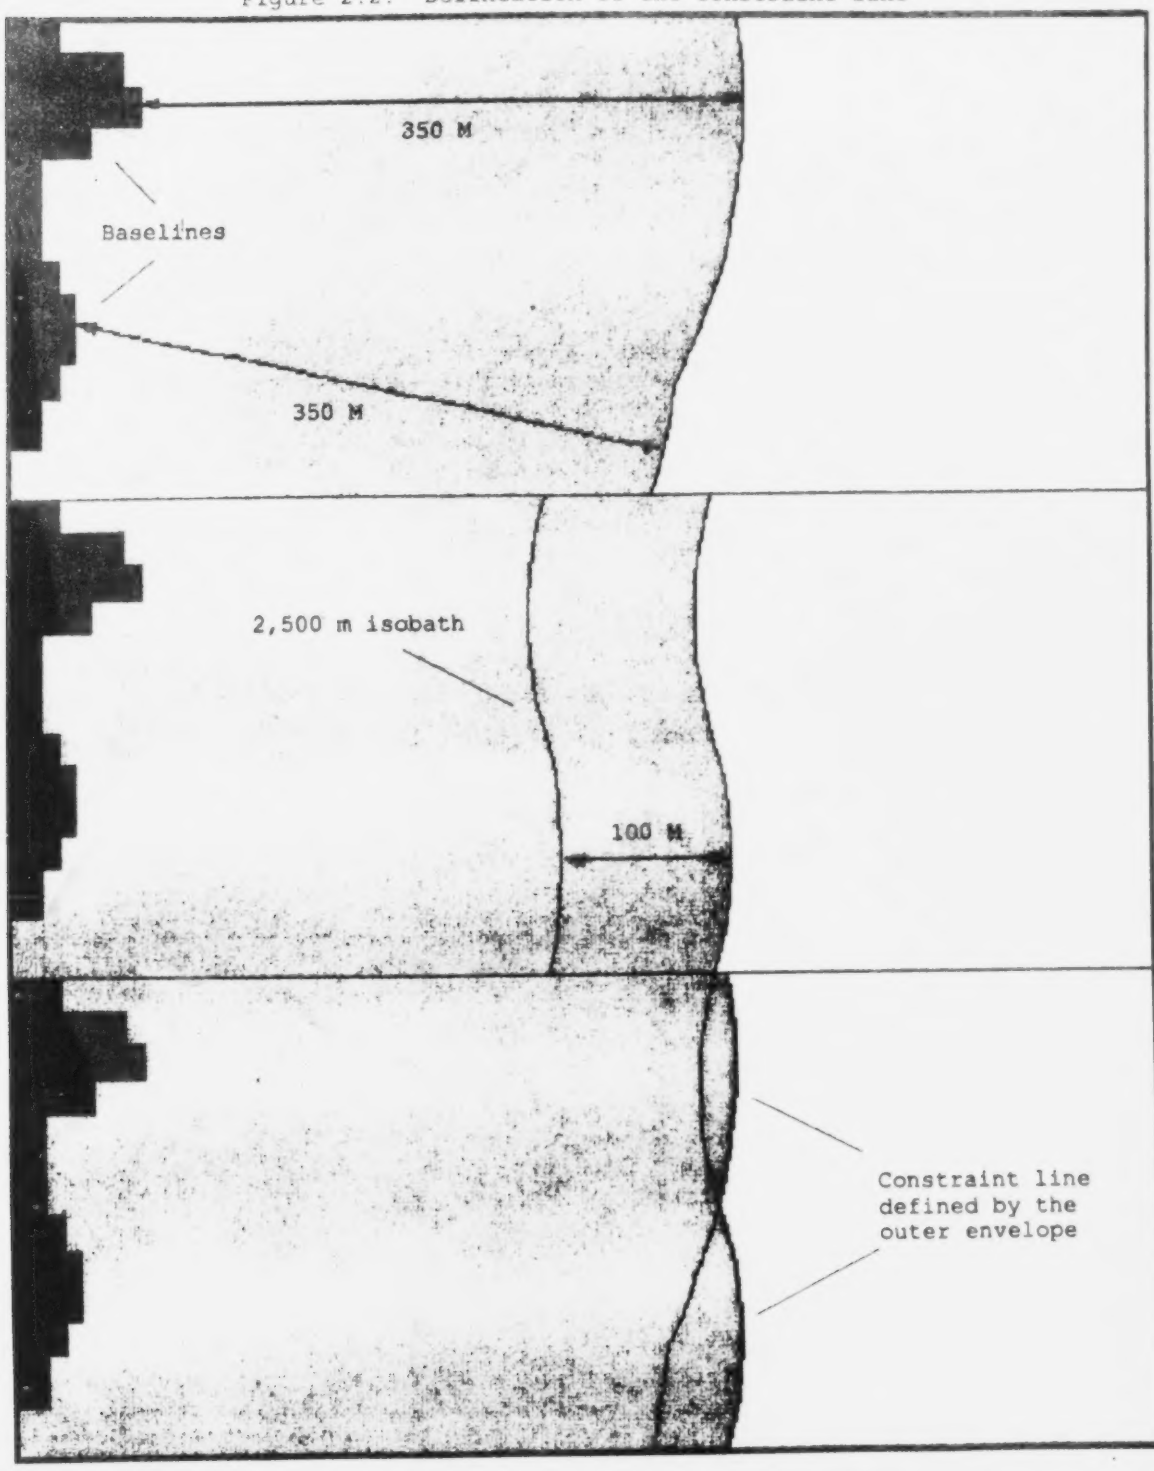

Figure 2.3. Delineation of the outer limits of the extended continental shelf

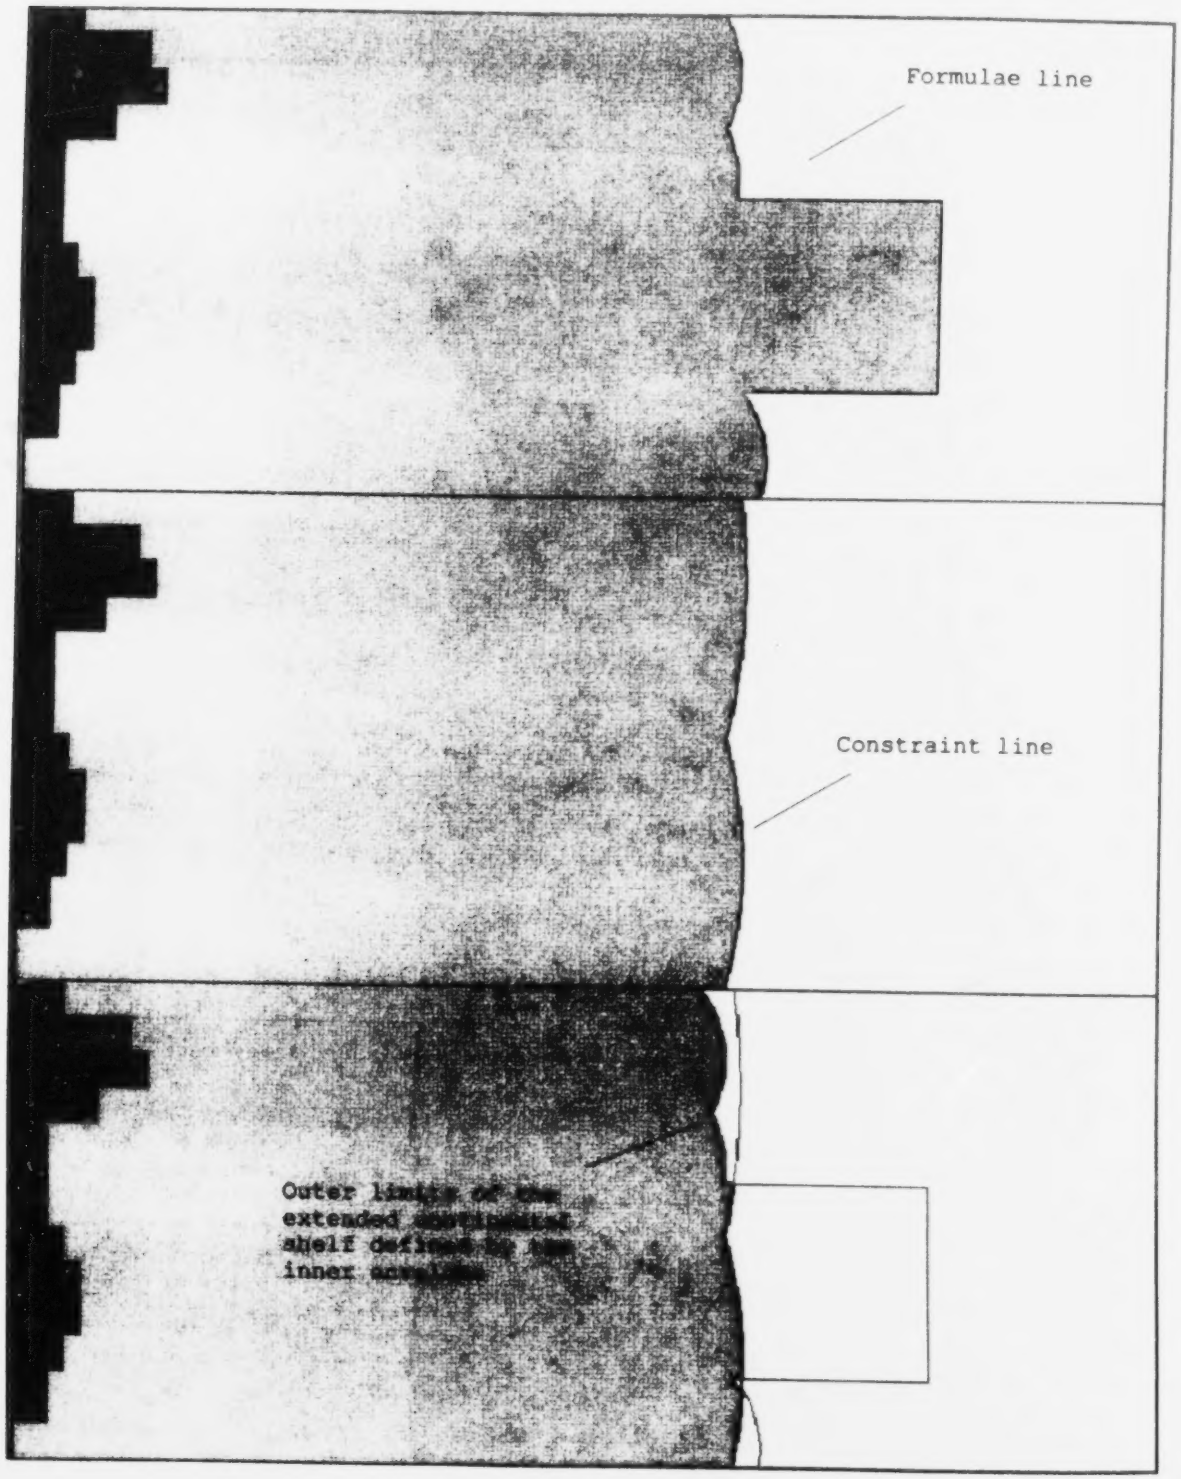

3. Geodetic methodologies and the outer limits of the continental shelf

3.1. Formulation of the problem: paragraphs 1, 4, 5 and 7

3.2. Units, geodetic reference systems and coordinate transformations

3.3. Geodetic definition of baselines

3.4. Outer limits and their confidence zones

3.1. Formulation of the problem: paragraphs 1, 4, 5 and 7

The Commission on the Limits of the Continental Shelf recognizes that the Convention poses specific scientific requirements in the field of geodesy. States are requested to delineate the outer limits of the extended continental shelf based on different metric criteria. These criteria are applied from baselines from which the breadth of the territorial sea is measured, the foot of the continental slope, and the 2,500 m isobath.

Article 76, paragraph 1, establishes the right of coastal States to determine the outer limits of the continental shelf by means of a 200-nautical-mile distance criterion from baselines:

> "The continental shelf of a coastal State comprises the sea-bed and subsoil of the submarine areas that extend beyond its territorial sea throughout the natural prolongation of its land territory to the outer edge of the continental margin, or to a distance of 200 nautical miles from the baselines from which the breadth of the territorial sea is measured where the outer edge of the continental margin does not extend up to that distance."

Paragraph 4 (a) also places the same requirement as part of the appurtenance test:

> "For the purposes of this Convention, the coastal State shall establish the outer edge of the continental margin wherever the margin extends beyond 200 nautical miles from the baselines from which the breadth of the territorial sea is measured, by either: ...".

Paragraph 4 (a) (i) and (ii) places requirements to measure the distance between the foot of the slope and a point at which the sediment thickness provides a ratio of 1 per cent, and to delineate a limit up to a distance of 60 nautical miles from the foot of the continental slope:

> "(i) a line delineated in accordance with paragraph 7 by reference to the outermost fixed points at each of which the thickness of sedimentary rocks is at least 1 per cent of the shortest distance from such point to the foot of the continental slope; or
>
> "(ii) a line delineated in accordance with paragraph 7 by reference to fixed points not more than 60 nautical miles from the foot of the continental slope."

Paragraph 5 poses requirements to delineate limits at distances of 350 nautical miles from baselines, and/or 100 nautical miles from the 2,500 metre isobath:

> "The fixed points comprising the line of the outer limits of the continental shelf on the sea-bed, drawn in accordance with paragraph 4 (a) (i) and (ii), either shall not exceed 350 nautical miles from the baselines from which the breadth of the territorial sea is measured or shall not exceed 100 nautical miles from the 2,500 metre isobath, which is a line connecting the depth of 2,500 metres."

Paragraph 6 requires, in the case of submarine ridges, that the limit should be delineated at a distance of no more than 350 M from the baselines.

Thus, implicitly, it imposes the requirement to delineate a limit at a distance of 350 nautical miles from baselines:

> "Notwithstanding the provisions of paragraph 5, on submarine ridges, the outer limit of the continental shelf shall not exceed 350 nautical miles from the baselines from which the breadth of the territorial sea is measured. This paragraph does not apply to submarine elevations that are the natural components of the continental margin, such as its plateaux, rises, caps, banks, and spurs."

Article 76, paragraph 7, poses a requirement to ensure that the straight lines which form the outer limit of the continental shelf do not extend beyond 60 nautical miles:

> "The coastal State shall delineate the outer limits of its continental shelf, where the shelf extends beyond 200 nautical miles from the baselines from which the breadth of the territorial sea is measured, by straight lines not exceeding 60 nautical miles in length, connecting fixed points, defined by coordinates of latitude and longitude."

3.2. Units, geodetic reference systems and coordinate transformations

The Convention makes use of two units of length: the metre (m) and the nautical mile (M). Both units are part of the Système International d'Unités (SI) (Bureau International des Poids et Mesures, 1991). The current international definition of the metre was adopted by the Conference Générale des Poids et Mesures (CGPM) in 1983. Following the proposal adopted by the International Hydrographic Bureau (IHB) in 1929, the international nautical mile is a unit of length defined by the identity:

1 M = 1,852 m.

The Commission discourages the use of any approximation to the above exact definition. The approximation to the nautical mile based on the length of an arc of a meridian of 1 minute of increment in latitude should be avoided in particular. Figure 3.1 illustrates the continuous variable length of an arc of a meridian of 1 minute of latitude as a function of the latitude of its midpoint from the equator to either of the poles on the same ellipsoid shared by the

Geodetic Reference System 1980 (GRS80) and the World Geodetic System 1984 (WGS84).

The Commission feels compelled to emphasize that the abbreviation adopted by the International Hydrographic Organization (IHO) for a nautical mile is M and that this abbreviation applies equally in all languages (International Hydrographic Organization, 1990, p. 22).

The Convention does not identify explicitly the surface over which all distances prescribed to delineate the outer limits of maritime spaces under national jurisdiction should be measured. Several surface options could conceivably be available to measure them. These could be mean sea level, the geoid or the seabed, among others. Alternatively, the chord segment joining the two end points of a line could also be proposed as an option to measure distances. The Commission feels that the use of any of these options might result in the uneven application of distance criteria in the analysis of each submission.

The surface of a geodetic reference ellipsoid associated to the reference system adopted by a coastal State in each submission shall be accepted by the Commission to determine all distances in order to ensure the application of a uniform metric criterion at all times. This choice ensures consistency from a geodetic perspective and appears to be also justified under international customary law. The Commission recognizes that there is an established uniform State practice which demonstrates the use of this surface for the determination of the outer limits of the territorial sea, the contiguous zone, the exclusive economic zone and, most importantly, the continental shelf when it is defined by means of a metric criterion up to a distance of 200 M.

The Commission acknowledges the requirements stated in article 76, paragraphs 7 and 9, and article 84, paragraphs 1 and 2, for the specification of the geodetic coordinates of the outer limit of the continental shelf. Article 84, paragraph 1, highlights in particular the requirement to specify the geodetic datum used to refer to the coordinates of the outer limit.

The Commission is aware of the sovereign right of each State to make submissions in fulfilment of the above requirements, selecting for this purpose either the geodetic reference system officially used for its national geodetic control or nautical charting activities, or any other international reference system adopted by the State. The Commission shall use the geodetic reference system used by each State in the preparation of its submission as the basis for all geodetic computations, analyses and recommendations.

In the interest of ensuring that the international dissemination of all relevant geodetic information relating to the outer limit of the continental shelf is conducted in a manner capable of being readily recognized by third States, the submitting State may be required by the Commission to provide:

- Coordinates of the outer limit of the continental shelf in an International Terrestrial Reference System (ITRS) adopted by the Commission;

- Transformation parameters between the reference system used in the submission and an ITRS adopted by the Commission; and

- Full information relating to the scientific methodology employed to determine these transformation parameters.

The Commission acknowledges the convergence of two separate realizations of an ITRS into a single international standard. One of these realizations is recommended by the International Union of Geodesy and Geophysics (IUGG) and the other by the International Hydrographic Organization (IHO).

IUGG recommends the use of the International Terrestrial Reference System (ITRS) according to Resolution No. 2 adopted at its 20th General Assembly held at Vienna in 1991. ITRS is monitored by the International Earth Rotation Service (IERS). Practical realizations of ITRS are produced periodically under the name of International Terrestrial Reference Frames (ITRF) (e.g., Boucher et al., 1996, 1998), which are defined by means of coordinates and velocities for a number of IERS sites distributed worldwide (McCarthy, 1996).

Whenever geodetic coordinates (ϕ, λ, h) are required from ITRF-yy positions, the ellipsoid associated with GRS80 adopted by the IUGG in Resolution No. 7 during its 17th General Assembly held at Canberra in 1979 will be used (Moritz, 1984).

IHO, on the other hand, recommends the use of WGS84 as an international hydrographic positioning standard, according to its Technical Resolution B1.1 and Special Publications Nos. 44 and 52 (International Hydrographic Organization, 1988, 1993). WGS84 has been preceded by three previous reference systems: WGS60, WGS66 and WGS72.

The Commission notes that for all practical purposes involved in the determination of positions relating to a submission, ITRF94, recommended by IUGG, and WGS84 (G873), recommended by IHO, can be regarded as equivalent realizations of an ITRS. Geodetic coordinates referred to one system will be regarded by the Commission as equivalent in the other.

The Commission highlights the important value of the geodetic products made freely available to States by the International GPS Service (Neilan et al., 1997). The availability of clock corrections and precise ephemerides is extremely useful in producing geodetic positions in ITRF-yy free from systematic errors induced deliberately in the GPS satellite signal through Selective Availability (SA).

The Commission acknowledges that SA remains the single most important source of error in the determination of WGS84 positions from GPS satellite broadcast ephemerides. The use of products from the International GPS Service is the most inexpensive, accessible and accurate avenue to determine WGS84 (G873) point positions through ITRF94.

The Commission acknowledges that the transformation of coordinates from one reference system to another can be a very complex problem (Vanícek, 1990, 1992). Sometimes the estimation of transformation parameters has been carried out among

different realizations of the same ITRS by an international scientific organization. Transformation parameters valid at given epochs among the various ITRF-yy, for example, are produced by IERS (McCarthy, 1996). The Commission regards the transformation parameters estimated by IERS and their mathematical formulation as admissible geodetic methodologies in a submission that involves transformations between and among all ITRF-yy realizations.

However, the estimation of coordinate transformation parameters between a national reference system and a particular realization of an ITRS is a far more complex problem. This coordinate transformation involves deformations in addition to a seven-parameter transformation composed of three rigid rotations, three rigid translations and a scale change. Commission X of IAG is currently developing transformation methodologies between different reference systems. The Commission acknowledges the existence of several methodologies designed in the past to address this problem (e.g., Applebaum, 1982) and that attempts have been made to implement them in practice, for example, between WGS84 and many local reference systems (Defense Mapping Agency, 1984). The Commission feels that the ultimate responsibility for the preparation of all the scientific and technical evidence, including coordinate transformations, which supports a submission lies with the coastal State.

The Commission will pay special attention to the determination of transformation parameters and their mathematical formulation when a national reference system different from ITRF94 or WGS84 (G873) is used in a submission.

3.3. Geodetic definition of baselines

The Commission is not entitled by the Convention to issue any recommendations with respect to the delineation of baselines from which the breadth of the territorial sea is measured. Its role is limited to a potential request for information about the geodetic position and definition of the baselines used in a submission.

There are only two instances in which the Commission might request geodetic information about baselines. First, it must be satisfied that the test of appurtenance has been met. Second, if the 350 M limit is employed as a constraint in a submission, the Commission might also find it useful to make recommendations in relation to the methodology employed in its delineation.

The Commission acknowledges that it is not entitled by the Convention to make recommendations vis-à-vis claims to a continental shelf up to a distance of 200 M. A submitting coastal State will not be requested to provide any information about the baselines that generate the portion of the limits of the continental shelf delineated at this distance.

Article 5 prescribes the use of the low water line as the basis for defining normal baselines. However, the Convention does not provide guidance in relation to the exact meaning of this term. The Commission acknowledges that many different definitions are used in State practice and that some define a lower tidal datum than others. Some States use simultaneously two or more definitions of the low water line in separate geographic regions in view of the challenges posed to navigation by specific regional tidal regimes. Different

low water lines are used routinely to display the profile of the coastline on official nautical charts.

The Commission feels that there is a uniform and extended State practice which justifies the acceptance of multiple interpretations of the low water line. All of these are regarded as equally valid in a submission, with the condition that none may fall below the level of the lowest astronomical tide (LAT).

The Commission is aware that there are different chart datum transfer techniques designed to provide the location of the low water line at sites on the coastline other than tide gauge sites. The Commission might require background technical information in relation to the methodology used by the State for this purpose in each submission.

Articles 7, 9, 10 and 47 entitle States to delineate straight, closing and archipelagic baselines. The Convention does not specify the geometric definition of these lines. Again, in the case of straight baselines delineated in accordance with the provisions of article 7, at least two line definitions, loxodromes and geodesics, have been adopted in State practice (United Nations, 1989).

In accordance with established State practice, the Commission shall accept the definition of straight, closing and archipelagic baselines as either geodesics or loxodromes. However, only one line definition can be consistently selected by a submitting State for all of its baselines. In the case of loxodromes, the Commission shall use the definition of a line of a constant azimuth on the surface of a geodetic reference ellipsoid (Bowring, 1985). The Commission strongly discourages the use of apparent straight lines as literally drawn on various map projections.

The Commission is aware of the difficulties confronted by island States with a large number of islands (>500 islands) and a potential extended continental shelf claim in ascertaining the position of baselines from which the 200 and 350 M limits can be delineated. These difficulties are posed by the complexity of the provisions contained in article 47 relative to the water-to-land ratio and distance constraints. In response to this problem, it is important to clarify that exhaustive iterative combinatorial algorithms have been developed to investigate and test their potential status as archipelagic States (Carrera, 1992).

The Commission remains open to all forms and combinations of methods used to determine the position of baselines by a State in a submission provided that the following information about them is presented upon request.

- Source of the data;
- Positioning survey technique;
- Time and date of the survey;
- Corrections applied to the data; and
- A priori or a posteriori estimates of random and systematic errors.

3.4. Outer limits and their confidence zones

The delineation of the outer limits of the extended continental shelf according to article 76 requires the determination of at least four outer limits delineated:

- By reference to the outermost fixed points at each of which the thickness of sedimentary rocks is at least 1 per cent of the shortest distance from such point to the foot of the continental slope;
- At a distance of 60 M from the foot of the slope;
- At a distance of 350 M from baselines from which the breadth of the territorial sea is measured; and
- At a distance of 100 M from the 2,500 m isobath.

Boggs (1930) originally defined the technique used to determine the outer limits of the territorial sea from a selection of points along normal baselines as the method of envelopes of arcs. It was first introduced as a proposal for codification in international law by the United States delegation at the Hague Codification Conference in 1930. This method provides an outer limit every point of which is located at a prescribed distance from the nearest point on the coast. Shalowitz (1962, p. 171) has advanced a more refined definition of this method, where the outer limit:

> "is the locus of the centre of a circle the circumference of which is always in contact with the coastline, that is, with the low water line or the seaward limits of inland waters".

The application of the method of envelopes of arcs is independent of the actual breadth of the limit. Thus, although the method was originally designed as a tool to determine the outer limit of the territorial sea, its mathematical application remains equally valid to determine the outer limit of other maritime spaces based on metric criteria.

The Commission regards the application of the method of envelopes of arcs on the surface of the geodetic reference ellipsoid in a submission as an admissible methodology to determine outer limits based on metrics from the nearest points located on normal baselines, the 2,500 m isobath, and the foot of the slope. The actual implementation of this method is carried out by solving iteratively a system of linearized distance equations in a resection mathematical model. An exhaustive combinatorial search algorithm is recommended in order to ensure that all possible combinations of pairs of points are analysed and that the nearest points are the ones which generate the outer limit.

The distance resection model described above relies on the solution of the direct and inverse positioning problems formulated in geodesy. A large number of solutions to these classic problems have been developed over the last two centuries. These can be broadly classified into three groups, based upon: the integration of differential equations; transferring an ellipsoid polar triangle

to a concentric sphere; and using a conformal projection from the ellipsoid to the sphere (Schnadelbach, 1974). The Commission does not have a preference for the use of a particular solution and it is aware that the correct application of several of them must produce identical results.

The Commission acknowledges the existence of the method of tracés parallèles to determine the outer limits of maritime spaces from straight baselines as prescribed by the International Court of Justice in the Anglo-Norwegian Fisheries Case of 1951. This method is a generalization of the method of envelopes of arcs for the cases of continuous straight, closing and archipelagic baselines.

The Commission regards the application of the method of tracés parallèles on the surface of the geodetic reference ellipsoid used in each submission as an admissible methodology to determine outer limits at distances of 200 M and 350 M from the nearest points located on straight, closing and archipelagic baselines from which the breadth of the territorial sea is measured.

The mathematical model for the determination of outer limits from straight baselines on the surface of a geodetic reference ellipsoid is computationally more intensive than the method of envelopes of arcs. It involves the successive application of the direct and inverse problems described above over a large number of discrete series of points along straight, closing and archipelagic baselines.

The two formulations described above have not made any reference to the introduction of a priori statistical information about the position of the baselines for the sake of simplicity. In practice, this information must be incorporated in order to derive the confidence region associated with the limit (Sjoberg, 1996). It is clear, however, that the derived offshore limit will never surpass the accuracy of the positions of the baselines themselves, and therefore those States aiming to achieve the highest standards of accuracy in the determination of their outer limits should focus first on the accuracy of their baselines.

The Commission strongly discourages the application of the methods of envelopes of arcs and tracés parallèles through the use of manual graphical procedures on the surface of paper nautical charts. The distortions produced by inherent scale factors in map projections and the inapplicability of Euclidean geometry principles on the surface of a geodetic ellipsoid rule out the admissibility of this manual methodology.

The Commission highlights three observations made by Gidel (1932, p. 510) more than half a century ago: first, that there is no parallelism between the coast and the limit; second, that the outer limit is simpler than the normal baseline; and, most importantly, that only a few points contribute to the delineation of the outer limit. There is no need to survey the full extent of the coastline, a full 2,500 m isobath or the continuous foot of the slope. Only the most seaward points which effectively contribute to the delineation of the outer limit need to be positioned.

Figure 3.1. **Length of a meridian arc of 1 minute of latitude as a function of the latitude of its midpoint from the equator to either of the poles on GRS80 and WGS84**

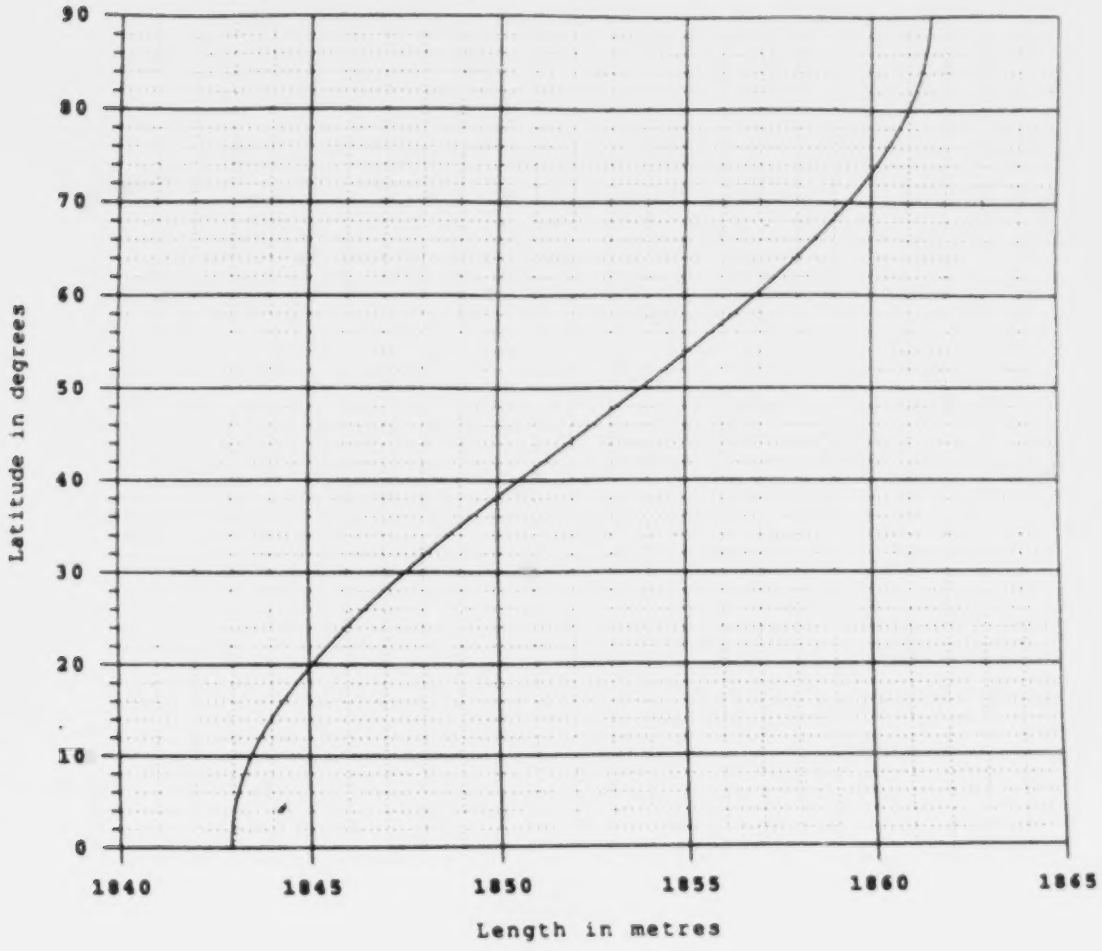

/...

4. The 2,500 metre isobath

4.1. Formulation of the problem: paragraph 5

4.2. Sources of data and hydrographic measurements

4.3. Bathymetric model

4.4. Selection of points for the delineation of the 100 M limit

4.1. Formulation of the problem: paragraph 5

The Commission recognizes that the 2,500 m isobath is an essential feature for the implementation of article 76. It serves as the basis for the application of one of the constraint rules to the formulae lines in order to produce the outer limits of the continental shelf. According to paragraph 5, it is the reference baseline from which the 100 M line is measured:

> "The fixed points comprising the line of the outer limits of the continental shelf on the sea-bed, drawn in accordance with paragraph 4 (a) (i) and (ii), either shall not exceed 350 nautical miles from the baselines from which the breadth of the territorial sea is measured or shall not exceed 100 nautical miles from the 2,500 metre isobath, which is a line connecting the depth of 2,500 metres."

A line delineated at a distance of 100 M from the 2,500 metre isobath may not be used in the delineation of the outer limits of the extended continental shelf in the special case of submarine ridges. Paragraph 6 makes an exception of submarine elevations where it is required:

> "Notwithstanding the provisions of paragraph 5, on submarine ridges, the outer limit of the continental shelf shall not exceed 350 nautical miles from the baselines from which the breadth of the territorial sea is measured. This paragraph does not apply to submarine elevations that are natural components of the continental margin, such as its plateaux, rises, caps, banks and spurs."

4.2. Sources of data and hydrographic measurements

The complete bathymetric database used in the delineation of the 2,500 m isobath in a submission may only include a combination of the following data:

- Single-beam echo sounding measurements;
- Multi-beam echo sounding measurements;
- Bathymetric side-scan measurements; and
- Seismic reflection-derived bathymetric measurements.

The Commission will consider single- and multi-beam echo sounding measurements as the primary source of evidence for the delineation of the 2,500 m isobath. All other admissible evidence provided by bathymetric side-scan measurements and seismic reflection-derived bathymetric measurements will be regarded as complementary information.

The bathymetric information derived from seismic reflection surveys will be considered in a submission for the purpose of delineating the 2,500 m isobath. The Commission will pay particular attention to the calibration and corrections applied to these data.

Bathymetric side-scan sonars are hybrid measuring systems, which collect both estimates of sea-floor slope and bathymetry. Whereas their sea-floor slope information might be relevant in other parts of a submission, potentially for the delineation of the foot of the slope, only their bathymetric component will be considered for the purpose of delineating the 2,500 m isobath.

The bathymetric data produced by light-detection-and-ranging (LIDAR) airborne systems may be particularly valuable to delineate the shallow portions of a bathymetric model included in a submission. However, laser (light amplification by stimulated emission of radiation) profiling is clearly inapplicable to the delineation of the 2,500 metre isobath.

Other sources of evidence, such as satellite altimetry-derived bathymetric data or imaging side-scan sonar information, will not be regarded as admissible for the purpose of delineating the 2,500 m isobath. This information, however, might be useful as additional qualitative information in support of other parts of a submission but will not be considered during the delineation of this or any other isobaths.

A full technical description of the bathymetric database used in the delineation of the 2,500 metre isobath will include the following information:

- Source of the data;
- Sounding survey techniques and classification;
- Geodetic reference system, and navigation positional methods and errors;
- Time and date of the survey;
- Corrections applied to the data, such as ray path sound velocity, calibration, tides and other; and
- A priori or a posteriori estimates of random and systematic errors.

A priori depth error estimates, $\underline{s}$, will be computed by means of the following internationally accepted formulae:

$$s = (a^2 + (b d)^2)^{1/2},$$

where:

a constant depth error, i.e. the sum of all constant errors

b*d depth-dependent error, i.e. the sum of all depth dependent errors

b factor of depth dependent error

d depth

with a 95 per cent confidence interval (IHO, 1998).

A posteriori errors may be obtained from the estimated co-variance matrix of the estimated depth parameters, which results from an adjustment of an overdetermined system of linear equations formed by sounding lines (cf. Vanícek, 1982, p. 213).

Coastal States will use the a posteriori error estimation method where there is redundant information in order to assess the quality of historical bathymetric data whose positioning, survey technique and technical description is not available.

4.3. Bathymetric model

The main body of the submission will include the necessary cartographic products derived from the compiled bathymetric database to portray the 2,500 metre isobath. These cartographic products may include the following analytic or digital forms:

- Two-dimensional bathymetric profiles;
- Three-dimensional bathymetric models;
- Nautical charts and maps with contours.

Each cartographic product will be accompanied by a detailed description of the mathematical methodology and data used to produce it. The Commission will pay particular attention to the transit from numeric soundings to analytic functions.

The coastal State will be required to document the following information:

- Interpolation or approximation method;
- Density of measured bathymetric data;
- Perceptual elements such as map projections, vertical and horizontal scales, contour intervals, units, colours and symbols.

Wherever the bathymetric information presented to the Commission may be a filtered or smoothed subset of the original data, a full description of the methodology employed to produce it will be reported by the coastal State.

Full bathymetric models in three dimensions may be required in order to gain a spatial understanding of natural prolongation and may be essential in selecting the full extent of the 2,500 m isobath relevant to the determination of the 100 M outer limit.

The Commission is aware that the seabed can exhibit fractal properties in two and three dimensions (Mandlebrot, 1977). It is also aware that the generation of an analytic model, be it that described by means of contours on a chart or an analytic mathematical expression, results in the generalization of line and surface features at various scales (Fox and Hayes, 1985). The Commission may conduct geostatistical, fractal and wavelet tests and analyses, or others as it feels appropriate, in order to determine the degree of uncertainty underlying a particular bathymetric model.

The Commission is aware that issues relating to scale, colour, type and others fall within the realm of perception. These issues will be taken into account in order to assess correctly the perception of important technical details.

The Commission will consider nautical charts officially recognized by the coastal State as the primary source of evidence for the delineation of the 2,500 m isobath. The Commission will consider all other cartographic evidence provided in the absence of nautical charts.

4.4. Selection of points for the delineation of the 100 M limit

The line delineated at a distance of 100 M from the 2,500 metre isobath becomes effective as a constraint over the outer limits of the continental shelf wherever this isobath is located at a distance of 250 M or greater from the baselines from which the territorial sea is measured.

The selection of the most salient points along the 2,500 m isobath for the purpose of delineating the 100 M limit may be straightforward when isobaths are simple. However, when isobaths are complex and in multiples the determination of the 2,500 m isobath becomes difficult. Such situations arise as a result of geological and tectonic processes shaping the present continental margins. They can create multiple repetitions of the 2,500 m isobath, for example, by folding and thrusting along convergent and sheared continental margins. In such cases, the Commission recommends the use of the first 2,500 m isobath from the baselines from which the breadth of the territorial sea is measured that conforms to the general configuration of the continental margin.

5. Foot of the continental slope determined as the point of maximum change in the gradient at its base[2]

5.1. Formulation of the problem: paragraph 4

5.2. Sources of data

5.3. Filtering and smoothing

5.4. Delineation of the foot of the continental slope

5.1. Formulation of the problem: paragraph 4

The Commission recognizes that the foot of the continental slope is an essential feature that serves as the basis for entitlement to the extended continental shelf and the delineation of its outer limits. According to paragraph 4 (a) (i) and (ii), it is the reference baseline from which the breadths of the limits of the formulae rules are measured:

> "(i) a line delineated in accordance with paragraph 7 by reference to the outermost fixed points at each of which the thickness of sedimentary rocks is at least 1 per cent of the shortest distance from such point to the foot of the continental slope; or
>
> "(ii) a line delineated in accordance with paragraph 7 by reference to fixed points not more than 60 nautical miles from the foot of the slope."

Paragraph 4 (b) provides a dual regime for the determination of the foot of the slope:

> "In the absence of evidence to the contrary, the foot of the continental slope shall be determined as the point of maximum change in the gradient at its base."

The Commission interprets the determination of the foot of the continental slope by means of the point of maximum change in gradient at its base, as a provision with the character of a general rule. The fundamental requirements posed by this provision are:

- The identification of the region defined as the base of the continental slope; and
- The determination of the location of the point of maximum change in the gradient at the base of the continental slope.

Its implementation will be guided by bathymetric, geomorphologic, geologic and geophysical sources of evidence.

---

[2] The contents of chapter 5 will be discussed further in the Commission.

5.2. Sources of data

Bathymetric and geological data provide the source of evidence to be used in the geomorphological analysis conducted to identify the region defined as the base of the continental slope. Only bathymetric information will be used to determine the location of the point of maximum change in the gradient at the base of the continental slope.

The bathymetric database used in the delineation of the foot of the slope in a submission may include only one, or a combination of the following data:

- Single-beam echo sounding measurements;
- Multi-beam echo sounding measurements;
- Hybrid side-scan measurements; and
- Seismic reflection-derived bathymetric measurements.

The Commission will require a full technical description of the bathymetric database used in the implementation of this provision. It will also determine the relative value from each of these sources of data in a manner that is consistent with that applied to the determination of the 2,500 metre isobath (cf. section 4.2).

The Commission will also consider as admissible evidence, synthetic bathymetric data derived from cartographic and analog sources officially recognized by the coastal State. These cartographic and analog sources may only be based, in turn, on a combination of the bathymetric measurements listed above. Synthetic bathymetric data will be accompanied by a detailed and complete technical description of the method applied and the bathymetric measurements used to produce the cartographic and analog sources from which it stems.

The coastal State will be required to document the following information about cartographic and analog sources:

- Interpolation or approximation methods;
- Spatial density and position of measured bathymetric data;
- Information on perceptual elements such as map projections, vertical and horizontal scales, contour intervals, units, colours and symbols.

The geological and geophysical database used in the identification of the region defined as the base of the foot of the continental slope in a submission may include a combination of the following sources of data:

- *In situ* samples and measurements;
- Geochemical and radiometric data;

- Geophysical measurements; and

- Side-scan imagery.

Evidence collected as in situ core samples will be accompanied by a complete technical description and their catalogue information will be also enclosed. In situ measurements may include any borehole or ocean-bottom geophysical measurements and their technical description.

Evidence collected in the form of geochemical and radiometric data will also be accompanied by a full technical description and their catalogue information will be enclosed.

Evidence collected in the form of geophysical measurements includes the full range of geophysical methods, including but not limited to, seismic, gravity, magnetic, palaeomagnetic and side-scan sonar imagery data.

5.3. Filtering and smoothing

The Commission recognizes that filtering and smoothing of bathymetric data might be required in order to facilitate the identification of the location of the foot of the continental slope at the point of maximum change in the gradient at its base. This procedure might be required in some instances because the use of second derivatives of the bathymetric surface produces an enhancement of all features which may obscure the exact location of the foot of the slope.

Filtering in signal theory presupposes a clear differentiation between signal and noise, that is, what is to be regarded as wanted and unwanted information. In the context of the application of paragraph 4 (b), the shelf, the slope and the rise are signal. Any other information that obstructs the location of these features is regarded as noise.

The Commission is aware that the application of some filtering procedures presupposes the use of regularly spaced data. These data are seldom collected in the field at equally spaced intervals. In these instances, a coastal State might produce a regularly spaced data set from irregularly spaced data. The Commission is aware that there are many approaches to performing this operation. It will pay close attention to the methodology employed to produce a regularly spaced data set, and it might request the original irregularly spaced data, details about the mathematical technique employed and the output comprised of regularly spaced data.

The Commission is aware that filter design is a wide field and that their frequency response functions of filters are very different even if they are designed to cut off information at specific thresholds. The Commission will pay special attention to the definition of the admittance function of the filters used in the wavelength or wave number domain which might be applied to two-dimensional bathymetric profiles and three-dimensional bathymetric surfaces.

The Commission shall not accept the artificial amplification or enhancement of any information at wavelengths at which the bathymetric information can be decomposed. Only the removal of unwanted noise at wavelengths other than those

relevant to the description of the shelf, the slope and the rise will be regarded as admissible. The Commission might request full disclosure of the original unfiltered information, the mathematical details of the filter and the filtered data produced when filtering is applied.

Smoothing is an empirical procedure which also might have an important role to play in facilitating the identification of the main features of the continental margin. It might have a particularly useful application when several bathymetric features might have constituents of similar wavelengths to those which define the location of the foot of the continental slope.

The Commission is aware that the full array of empirical data smoothing techniques is vast. It remains open to considering the application of any smoothing technique, but it will examine closely the proper application of each one in this context. The Commission might request full disclosure of the original data, the mathematical details of the smoothing algorithm and the output data.

5.4. Delineation of the foot of the continental slope

The methodology used to determine the foot of the continental slope by means of the point of maximum change in gradient at its base can be regarded also as a two- or three-dimensional problem. This mathematical methodology has some similarities to the second derivative technique employed in the enhancement of potential field maps produced routinely in gravity and magnetic geophysical prospecting. The Commission recognizes the usefulness and complementarity of the use of both two- and three-dimensional approaches.

The Commission is aware of the large number of techniques and methods available for sea-floor classification and roughness analyses (e.g., Fox and Hayes, 1985; Stewart et al. 1992; and Harzfeld, 1993). Many methods based on, for example, fractal and geostatistical analysis have been developed.

The Commission will not prescribe the use of a single mathematical methodology based on bathymetric data for the identification of the region defined as base of the continental slope. It will make recommendations based on the mathematical methodology applied on a case-by-case basis, and in view of all other geological and geophysical evidence presented by the coastal State.

For the purpose of identifying the region defined as the base, the Commission defines the continental slope as the outer portion of the continental margin that extends from the shelf edge to the upper part of the rise or to the deep ocean floor where a rise is not developed. The rise, in turn, is the wedge-shaped sedimentary body having a smaller gradient than the continental slope.

The Commission defines the base of the continental slope as a zone where the lower part of the slope merges into the top of the continental rise, or into the top of the deep ocean floor where a continental rise does not exist.

The determination of the location of the point of maximum change in the gradient at the base of the continental slope will be conducted by means of the

mathematical analyses of two-dimensional profiles, three-dimensional bathymetric models, and preferably both. Methods based on a purely visual perception of bathymetric data will not be accepted by the Commission.

The determination of the location of the point of maximum change in the gradient was envisaged originally by its proponent as a two-dimensional problem based on the mathematical analyses of two-dimensional bathymetric profiles (Hedberg, 1976). This methodology is acceptable to the Commission with the provision that their three-dimensional location on a bathymetric map or nautical chart is provided at all times. The Commission recommends that the orientation of this profile be such that it runs in a perpendicular direction to the isobaths located at the point of maximum change in the gradient at the base of the continental slope.

The Commission is aware that several three-dimensional techniques have been designed in the past to produce a continuous trace of the foot of the continental slope. These techniques are based on the determination of the total curvature surface (Vanícek and Ou, 1996), the second derivative surface in the direction of the gradient (Benntet, 1996) and other second derivative-based analyses.

The Commission is also aware that the application of different two-dimensional and three-dimensional methodologies might yield different results in a given submission using the same data set, but it is ready to consider the application of one or several of them. In these cases, the Commission might perform comparative analyses of the results obtained by the application of two-dimensional methods, three-dimensional methods, or both.

[The Commission will request a complete technical description of the original three-dimensional bathymetric model, the details of the mathematical methodology, and the output surface and the point or line defining the foot of the continental slope.]

[Where more than a single maximum change in the gradient is located at the base of the continental slope, the Commission recommends that the foot of the continental slope be determined by means of an approach that starts from the rise, or from the deep ocean floor where a rise is not developed, in the direction of the continental shelf. This approach will identify the first break located in the outer part of the base of the continental slope. It will then proceed to identify the second break in a landward direction. If the second break is less deep by more than 1 per cent of its total depth than the first break, the first break will be considered to be the foot of the slope. If it is not, the second break will be selected as the next break to be analysed in an iterative procedure that exhausts all maxima located at the base of the continental slope.]

[Key point for further discussion]

6. Foot of the continental slope determined by means of evidence to the contrary

6.1. Formulation of the problem: paragraph 4 (b)

6.2. Geological and geophysical evidence

6.3. Determination of the extent of continental margins

6.4. Considerations to be given with respect to "evidence to the contrary"

6.1. Formulation of the problem: paragraph 4 (b)

The Commission recognizes that the determination of foot of the slope can be achieved by means of two equally acceptable criteria. According to article 76, paragraph 4 (b):

> "In the absence of evidence to the contrary, the foot of the continental slope shall be determined as the point of maximum change in the gradient at its base."

The Commission interprets the determination of the foot of the slope when evidence to the contrary is invoked, as a provision with the character of an exception rule. This provision not only does not oppose, but in fact complements, the general rule established by the determination of the foot of the slope as the point of maximum change in the gradient at its base.

The complementary character of this provision is emphasized by the fact that in addition to bathymetric and geomorphological evidence, all other necessary and sufficient geological and geophysical evidence must be also included as part of a submission by a coastal State.

The Commission feels it necessary to outline the breadth and scope of the evidence necessary and sufficient which will be required from States that might deem it appropriate to invoke this provision. This is preceded by the clarification of relevant scientific terms.

The Commission acknowledges that article 76 makes use of scientific terms in a legal context, which at times departs significantly from accepted scientific definitions and terminology. The trend for the creation of separate interpretations of terms can be traced back to the work carried out by the International Law Commission for the first United Nations Conference on the Law of the Sea by the International Law Commission (Oxman, 1969). Paragraph 1, which defines the legal concept of the continental shelf by means of a reference to the outer edge of the continental margin, provides a measure of the current gap between the juridical and scientific use of terms.

The definition of the continental margin in the earth sciences had a geomorphologic inception at the time of its adoption by various scientific organizations (Wiseman and Ovey, 1953). Current scientific knowledge about the nature and extent of the continental margin has evolved greatly from its

original definition. It incorporates many additional geological and geophysical concepts within the framework provided by plate tectonics (COSOD II, 1987; ODP/JOIDES, 1996).

Although article 76 refers to the continental shelf as a juridical term, it includes the concept of the continental margin with its natural components such as the shelf, the slope and the rise as geological and geomorphological categories. The fact that paragraph 4 (a) establishes a legal outer limit of the continental margin for the purpose of the Convention by no means diminishes the importance of the geological concepts and notions introduced in article 76, which are to be taken into account while establishing the outer limits of the [legal] continental shelf in acccrdance with article 76.

The following concepts and terms introduced in article 76 prove that the continental margin with its shelf, slope and rise are referred to in this article in their geological sense.

(a) Paragraph 1 of article 76 reads:

> "The continental shelf of a coastal State comprises the seabed and subsoil of the submarine areas that extend beyond its territorial sea throughout the natural prolongation of its land territory to the outer edge of the continental margin, or to a distance of 200 nautical miles from the baselines from which the breadth of the territorial sea is measured where the outer edge of the continental margin does not extend up to that distance."

Moreover, paragraph 3 of article 76 reads:

> "The continental margin comprises the submerged prolongation of the land mass of the coastal State, and consists of the seabed and subsoil of the shelf, the slope and the rise. It does not include the deep ocean floor with its oceanic ridges or the subsoil thereof."

These paragraphs contain concepts of the natural prolongation of land territory to the outer edge of the continental margin and the submerged prolongation of the land mass where a land mass represents a geological category and its natural submerged prolongation also should be considered in the geological sense of the terms.

(b) The reference in those paragraphs not only to the seabed, but also to the subsoil of the shelf, the slope and the rise clearly indicates that these terms are used in article 76 not only in their geomorphological, but also in their geological sense. That calls for consideration of tectonics, sedimentology and other aspects of geology to be considered while trying to define these important features for establishing the extent of the continental margin.

The methods for the determination of the continental margin and its components provided for in paragraph 4 are conventional and have legal meaning only for one structure of the margin, namely for the rise, although that affects the limits of the outer edge of the continental margin as a whole. Nevertheless

these methods are based on geological (tectonic and sedimentological) features typical for the continental margins (thickness of sediments and some distance from the foot of the slope) in various parts of the World Ocean. However, the application of those two methods for establishing the outer edge of the continental margin is closely linked to its component - the foot of the continental slope, and that became the key element in establishing the outer limit of the legal continental shelf in accordance with article 76. But the Convention does not provide any [conventional] methods of defining that element and the foot of the continent slope is still to be defined on the basis of geomorphological and geological criteria.

(a) One of them is specified in paragraph 4 (b) of article 76 as the point of maximum change in the gradient at its base. Although maximum change of the gradient may be considered as a hydrographic criterion, the reference to the base of the continental slope still calls for consideration of either geomorphological or other geological parameters, typical for such element;

(b) But the Convention in the same paragraph allows other methods to define the base of the continental slope, although it does not specify what particular methods may be used for the purpose.

This is clearly indicated in the provision of the same paragraph which reads that the method of defining the foot of the continental slope on the basis of the maximum change in the gradient is the one to be used, whenever the best geological and/or geomorphologic evidence supports it. Coastal States shall submit to the Commission the evidence to the contrary when they consider that it should be applied.

Bearing in mind that the continental margin and its parts, including the slope, are geological categories, this provision includes geological and geophysical considerations to be used in defining the outer part of the continental margin and the foot of the continental slope.

6.2. Geological and geophysical evidence

Some continental margins consist of three elements - the shelf, the slope and the rise - whereas others show no rise. The continental slope forms the outer portion of the continental margin and extends from this shelf edge to the top of the rise, or to the top of the deep ocean floor where no rise exists. The rise is normally a wedge-shaped sedimentary body having a smaller gradient than the slope. The rise developed predominantly in a rifted margin realm with sufficient supply of sediments from the continent after breakup and commencement of sea-floor spreading during and after subsequent thermal subsidence of the margin.

From a geomorphological perspective, the shelf in ideal cases is the part of the seabed adjacent to the continent which forms a kind of large submerged terrace, the average surface of which generally dips gently seaward. The breadth of the shelf depends on the geological evolution of the adjacent continent. The continental shelf extends seaward to the continental slope,

which is characterized by a marked increase in gradient. The base of the slope is a zone where the lower part of the slope merges into the top of the continental rise or into the top of the deep ocean floor, in the case where no rise exists.

From a geological perspective, the shelf and the continental slope have crustal characteristics typical of continental crust, including often thick layers of sediments. The foot and the base of the continental slope are linked, and commonly lie close to the outer edge of the continent, that is, near the place where the crust changes from continental to oceanic. Although continental crust is compositionally distinct from oceanic crust, the boundary between the two crustal types is often not clearly defined. Simple subdivision of margins into shelf, slope and rise is rarely found in practice owing to the variety of geological and geomorphological forms of the continental margin resulting from different tectonic and geological settings. Although it is rather difficult to generalize the geological and geomorphological parameters that a coastal State will consider to establish the base and the foot of the continental slope of its margins, considerations are presented here for alternative definitions of the foot of the continental slope based on plate tectonic evidence. The Commission also understands that these considerations do not encompass all geological and geomorphologic idiosyncrasies of all continental margins.

Types of continental margins

Over the last 20 years geoscientific studies and drilling of the International Deep Sea Drilling Project/Ocean Drilling Programme (DSDP/ODP) have demonstrated the presence of a variety of continental margins (e.g. COSOD II), which can be grouped into three major categories:

Convergent (active) continental margins are formed along plate boundaries linked to active and inactive subduction zones often, but not always, associated with a trench (e.g. ODP/JOIDES, 1996; Bally, 1988; Taylor and Natland, 1995). The convergent continental margins comprise three different types:

The accretionary convergent continental margin consists of a wide wedge of accreted sediments which were scraped off from the downgoing (lower) plate (figure 6.1A).

The poor- or non-accretionary convergent continental margin is characterized by a poorly developed accretionary wedge. Most of the incoming sediments are underplated beneath the upper plate or are removed by the downgoing (subducting) plate (figure 6.1B).

The destructive convergent continental margin shows no accretion. Material from the upper plate is eroded ("tectonic erosion") at the foot and from the base of the upper plate by the subducting lower plate (figure 6.1C).

Rifted (extensional, passive) continental margins were formed along incipient plate boundaries during continental breakup and subsequent initial production of oceanic crust by sea-floor spreading (e.g. Bally, 1988; Edwards and Santogrossi, 1990; von Rad et al., 1982; Coffin and Eldholm, 1991). The category of rifted continental margins can be subdivided into two types:

The wide, thin-crusted continental margin type (rifted non-volcanic margin) with widths of several hundreds of kilometres is characterized by a complex system of horsts and intervening grabens and half-grabens formed during the rifting and early drifting phases, and by a thinned continental crust (figure 6.1D).

The narrow, thick-crusted continental margin type (rifted volcanic margin) is characterized by a thick lower-crustal lens with seismic velocities in the range of 7.2-7.6 km/s, and by a huge volcanic construction in the upper crustal level displayed in seismic sections by an average 100 km wide and several thousands of metres thick wedge of seaward-dipping reflectors (figure 6.1E). Results of DSDP/ODP drilling have confirmed previous interpretations (e.g. Hinz, 1981) that the wedge of seaward-dipping reflections consists predominantly of basaltic lavas extruded in a shallow marine or subaerial environment. This voluminous volcanic body extending often continuously over distances of several thousands of kilometres along rifted continental margins was formed within a relatively short episode of transient volcanism during initial continental breakup. Recent studies have shown that approximately 70 per cent of the rifted Atlantic continental margins are volcanic continental margins.

Sheared continental margins were created along zones of translational continental rupturing during continental breakup and subsequent sea-floor spreading (figure 6.1F). [The number of figures might have to be changed.]

6.3. Determination of the [limits of the] continental margins

Article 76, paragraph 4 (b), implies that geological evidence may be introduced as an alternative for determining the location of the foot and the base of the continental slope. Hence, the limit of the continental margin may be considered on the basis of applying the provisions of paragraph 4 (a) to the foot of the continental slope based on the geological evidence supported by geological or geophysical data.

Convergent (active) continental margins

From a geoscientific perspective, the seaward extent of convergent continental margins is defined either by the seaward edge of the accretionary wedge (figures 6.1A and 6.1B), or in the case of the destructive convergent margin type by the foot of the upper plate and by the foot of the inner trench wall, respectively (figure 6.1C).

This distinct seaward limit or plate boundary can be determined with acceptable accuracy by modern multi-channel seismic techniques and modern bathymetric techniques (see also chap. 8). The Commission will consider this plate boundary as the foot of the continental slope in the context of paragraph 4.

Rifted (non-volcanic) and sheared continental margins

From a geoscientific perspective, the seaward limit of both the rifted non-volcanic continental margin and the sheared continental margin is defined as

the transition between continental crust and oceanic crust created by sea-floor spreading and related volcanic/magmatic processes. Although continental crust has a different composition from that of oceanic crust, the boundary between the two crustal types is often not clearly defined; sometimes gradational or oceanic crust may even intrude upon extended and downthrown continental crust.

Modern multi-channel and deep-penetrating seismic reflection studies and wide-angle reflection/refraction studies in parallel with magnetic and gravity measurements (see also chap. 8) are needed to determine the location of the transitional zone of the rifted non-volcanic continental margins and of the sheared continental margins, especially in areas where magnetic sea-floor spreading anomalies are not well developed.

Apart from drilling, sampling and coring of crustal outcrops, including seamounts in the transitional area between continental and oceanic crust, can provide evidence of rock type or lithology and supply material for a variety of studies (e.g. radiometric age dating, palaeontological age correlation, geochemical-isotope chemical analyses, palaeomagnetism) the results of which can be of use in determining the ocean-continent boundary along rifted non-volcanic and sheared continental margins. If the foot of the slope is very difficult to define on the basis of bathymetric data, the Commission might consider the transitional zone ("COT" in figures 6.1D and 6.1F) as an equivalent of the foot of the slope in context with paragraph 4. Since the transitional zone can extend over several tenths of kilometres, the Commission might consider either the landward boundary or the median line or even the seaward boundary of the transitional zone as the foot of the continental slope in the context of paragraph 4, provided that the submitted geophysical and geological data conclusively demonstrate that the submerged land mass of the coastal State extends to one of the lines and that the thickness of the igneous crust along the selected line distinctly exceeds the thickness of normal oceanic crust.

Rifted volcanic continental margins

Rifted volcanic continental margins are characterized by a thick low-crustal lens with high seismic velocities in the range of 7.0-7.6 km/s and a thick sequence of seaward-dipping reflectors (SDRS) beneath the basement surface. The SDRS merge seaward without a sharp boundary into oceanic crust created at a pre-existing oceanic ridge. Since the feather edge of the SDRS overlies rifted continental crust, a major part of the rifted volcanic continental margin can be considered as "the natural prolongation of the land territory" (article 76, paras. 1 and 3). The seaward extent of rifted volcanic continental margins can be defined as an area in which the SDRS terminate seaward and where the thickness of the igneous crust decreases to values typical of oceanic crust, i.e. less than 15 kilometres. Wide-angle reflection/refraction data and magnetic and multi-channel seismic reflection measurements are needed for determining this boundary of the rifted volcanic continental margins, which might be considered by the Commission as an equivalent of the foot of the slope in the context of paragraph 4. [key point for further discussion]

The Commission understands that some coastal States may have difficulties in obtaining data for defining the oceanic-continental crust boundary which, in some cases, is not clear.

Although geological (plate tectonic) considerations are very important for coastal States in deciding upon their own parameters of reasoning, geomorphological aspects must also be considered.

Among geological considerations, in addition to plate tectonics, it is recommended to consider also the sedimentary history of the margin resulting in the depositional build-up and geomorphological shaping of the margin.

6.4. Considerations to be given with respect to "evidence to the contrary"

If a State has given "evidence to the contrary" against using the foot of the continental slope (article 76 (4) (b)) in its submission, the Commission will deal with, inter alia, the following questions:

(i) Is that evidence acceptable to the Commission?

(ii) Does that evidence pertain to the identification of the foot of the continental slope? Is that evidence purely bathymetric and/or morphological?

(iii) Does that evidence include subsurface information aimed at establishing that the limit obtained by the rule of maximum change in gradient would not, for example, equate to the limit of the geological continental margin?

(iv) If such "evidence to the contrary" is presented as part of a submission, the Commission will request that it be also accompanied by the results of applying the rule of maximum change in gradient.

Figure 6.1: Schematic illustrations of different continental margin types

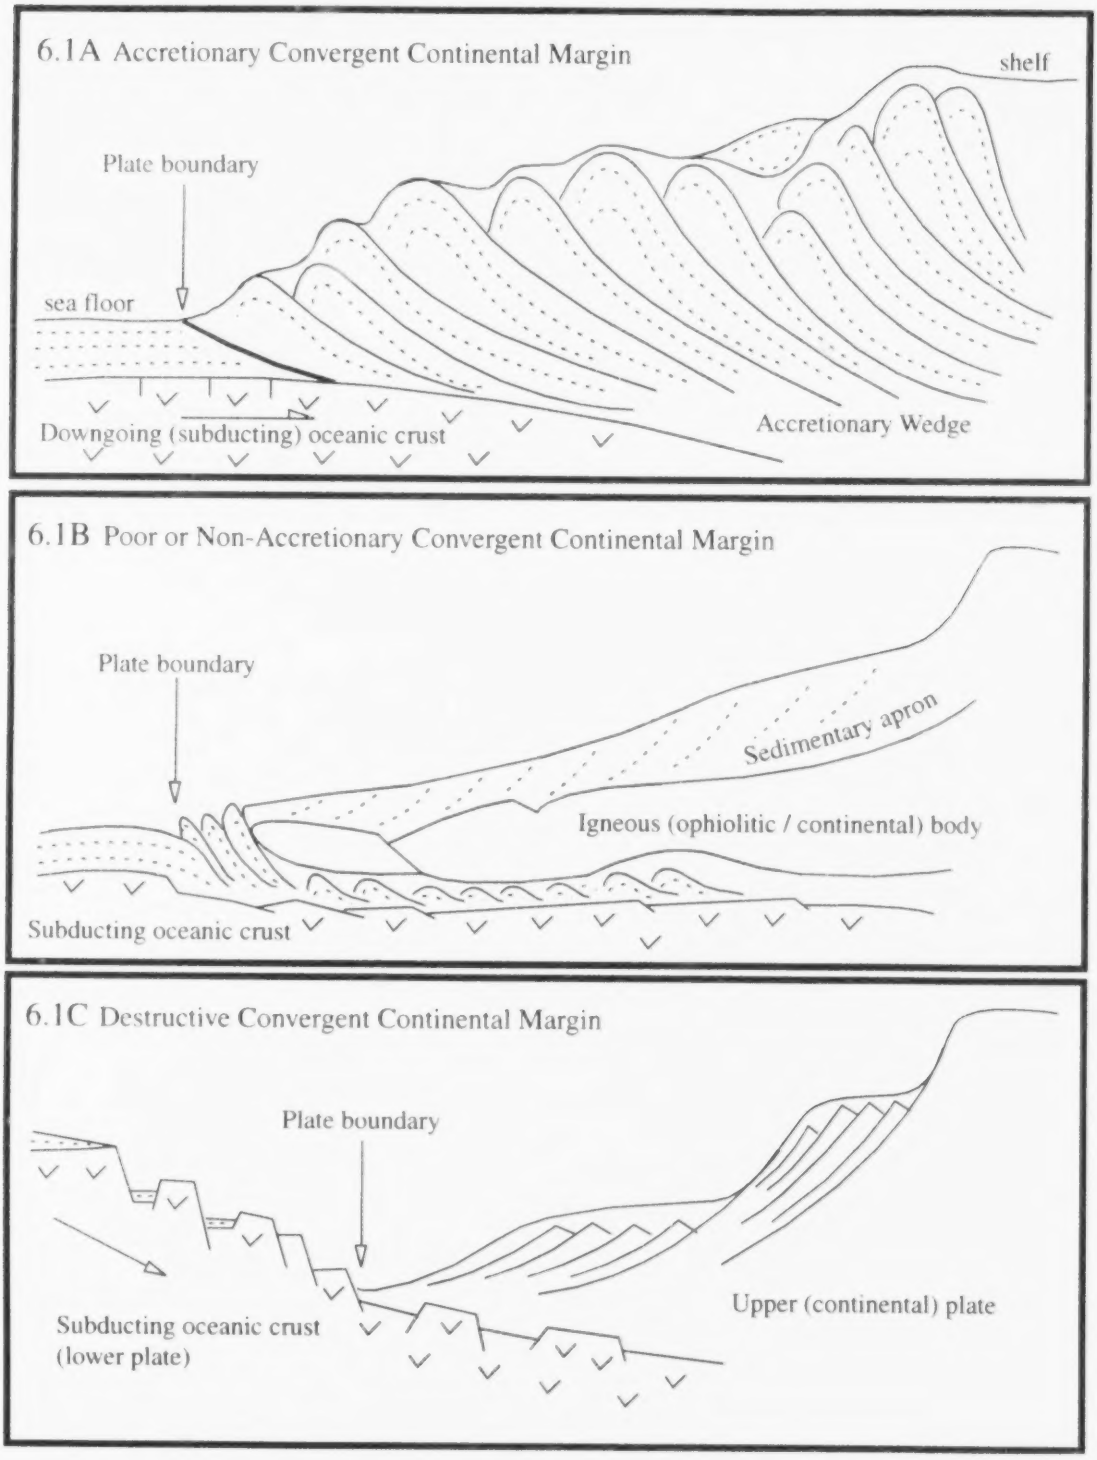

/...

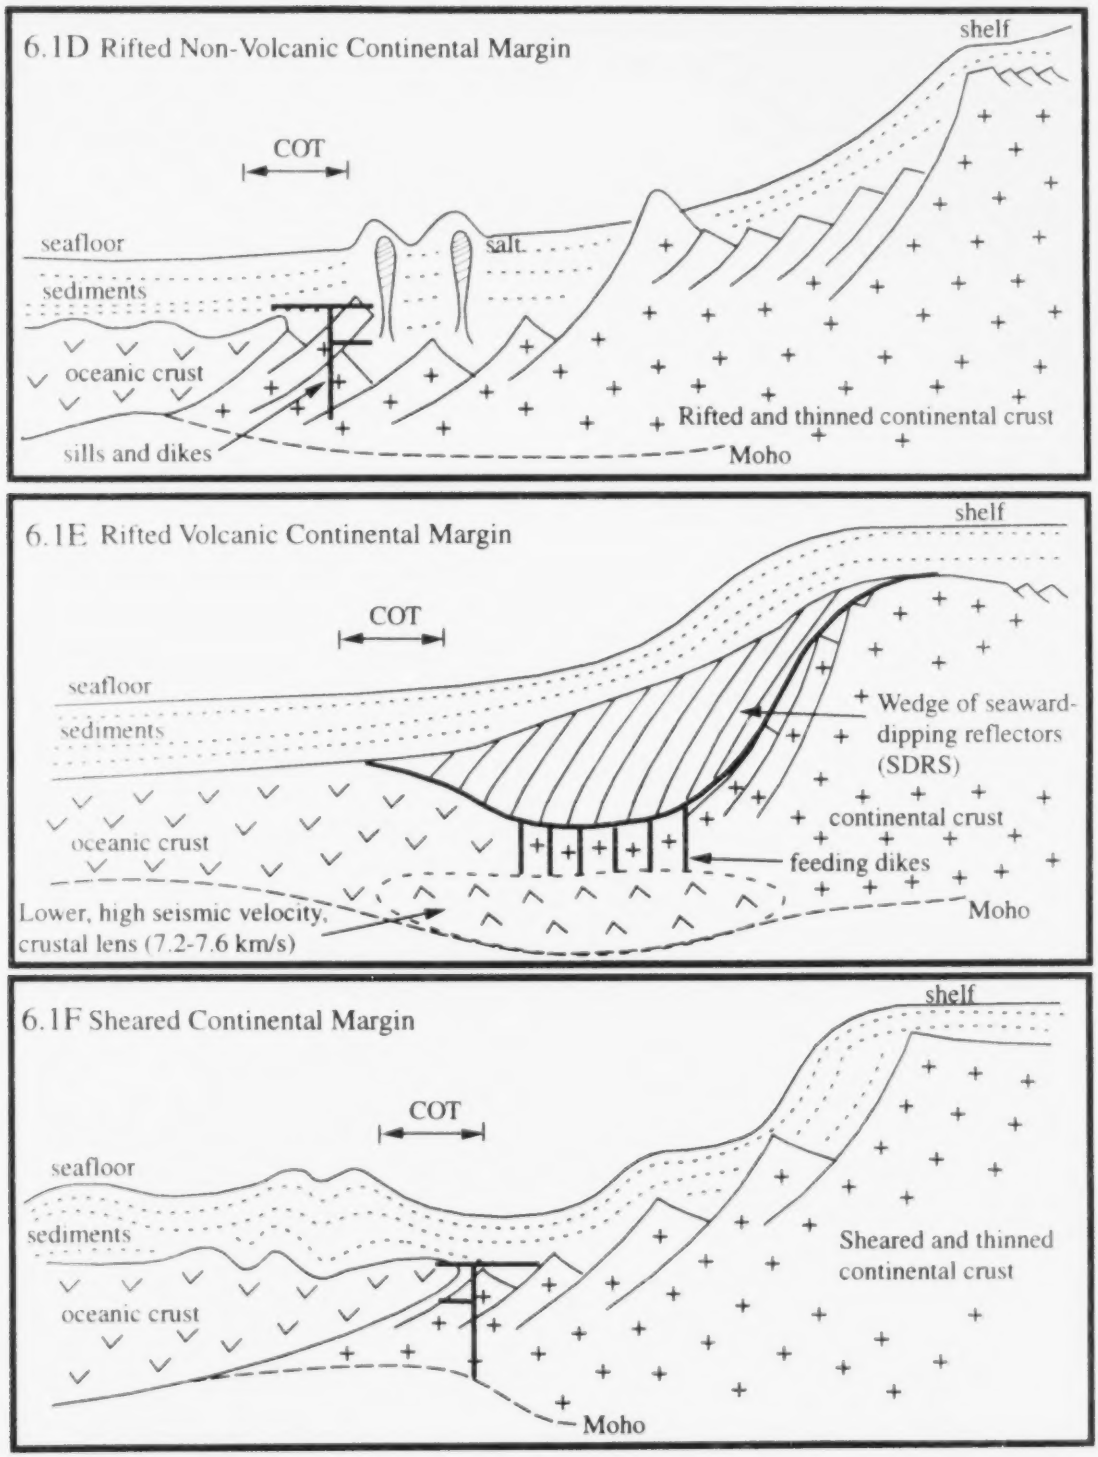

COT - CONTINENT/OCEANIC CRUST TRANSITION.

MOHO - BOUNDARY SURFACE SEPARATING THE CRUST FROM THE SUBJACENT MANTLE.

7. Ridges

7.1. Formulation of the problem: paragraphs 3 and 6

7.2. Oceanic ridges and submarine ridges

7.3. Submarine elevations

7.1. Formulation of the problem: paragraphs 3 and 6

The Commission is aware that oceanic and submarine ridges as well as submarine elevations are given special attention in article 76 with respect to issues of entitlement to an extended continental shelf and the delineation of its outer limits.

Paragraph 3 establishes that the continental margin does not include the deep ocean floor with its oceanic ridges:

> "The continental margin comprises the submerged prolongation of the land mass of the coastal State, and consists of the sea-bed and subsoil of the shelf, the slope and the rise. It does not include the deep ocean floor with its oceanic ridges or the subsoil thereof."

The above provision, through reference to paragraph 1, makes it clear that these oceanic ridges are not to be considered part of the continental shelf.

Paragraph 6 introduces the terms "submarine ridges" and "submarine elevations":

> "Notwithstanding the provisions of paragraph 5, on submarine ridges, the outer limit of the continental shelf shall not exceed 350 nautical miles from the baselines from which the breadth of the territorial sea is measured. This paragraph does not apply to submarine elevations that are natural components of the continental margin, such as its plateaux, rises, caps, banks and spurs."

The constraints contained in paragraph 6 for submarine ridges do not apply to submarine elevations that are natural components of the continental margin, such as "plateaux, rises, caps, banks and spurs".

Article 76 mentions three types of sea floor highs:

(1) oceanic ridges (paragraph 3)

(2) submarine ridges (paragraph 6) and

(3) submarine elevations (paragraph 6).

None of these terms is precisely defined. It seems that the term "ridge" is used on purpose, but the link between the "oceanic ridges" of paragraph 3 and the "submarine ridges" of paragraph 6 is unclear. Both terms are distinct from

the broader term "submarine elevations" of paragraph 6. Therefore, it is necessary to define clearly the meanings of those terms.

The distinction between the "submarine elevations" and "submarine ridges" or "oceanic ridges" shall not be based on their geographical denominations and names used so far in the preparation of the published maps and charts and other relevant literature. Such a distinction for the purpose of article 76 shall be made on the basis of scientific evidence taking into account the appropriate provisions of these Guidelines.

7.2. Oceanic ridges and submarine ridges

Ridges under the sea may be formed in a variety of geological processes, including:

- Ridges formed by the sea-floor spreading and associated volcanic-magmatic processes;
- Ridges formed along transform faults and created as an inherent part of the sea-floor spreading process;
- Ridges formed by later tectonic activity resulting in uplift of oceanic crust;
- Ridges formed by volcanic activity related to the movement of crust over a hot spot. These ridges are commonly composed of coalescing volcanic features or seamounts and generally occur on oceanic crust;
- Ridges formed by regional excessive volcanism related to plumes of anomalously hot mantle;
- Ridges associated with active plate boundaries and the formation of island arc systems. They could occur as active and inactive (remnant) volcanic arcs, and forearc and back-arc ridges. Such ridges commonly reflect different stages in the progressive development of island arc systems and may result from variations in factors such as the rate and direction of convergence, and from the nature of the plate being subducted;
- Ridges formed by rifting (extension and thinning) of continental crust. This process commonly forms broader features, such as marginal plateaux and rises, but sometimes creates elongated slivers of continental crust separated by oceanic or highly extended continental crust.

This categorization of ridges is not exhaustive and complete owing to the variety of the tectonic settings of the sea floor.

There is no common view among scientists as to what types of ridges may be considered as natural components of the deep ocean floor from the point of view of ocean floor tectonics and the origin of ridges. Some consider that only spreading ridges are parts of the deep ocean floor and should be included in the

term "oceanic ridge" under article 76. There is a more common view that "oceanic ridges" should include the first three types of ridges mentioned above, which are composed of oceanic basaltic rocks, although some consider that ridges formed along transform faults (marginal ridges) as a continuation of structures generated in a continental environment in the context of the separation of the continents are not included. The other ridge types, except perhaps for some back-arc ridges, have no relationship to oceanic crust. Some ridges located in the continental margins, no matter what their origin may be, have been present since the early evolution of the margin and have influenced it since then. Because of their presence, sediment dispersal and thickness and the morphology of the sea floor may have acquired a unique configuration and individualization within the regional context. In such cases, some consider that these ridges could be considered to be natural components of the margin.

It is clear that article 76 introduces two categories of ridges - oceanic and submarine ridges - and establishes for each category a different legal regime for defining the limit of the legal extended continental shelf in accordance with the Convention.

The Commission feels that the terms used in article 76 for ridges must be considered in their legal sense and for the purpose of article 76 must be treated separately on the basis of provisions of that article rather than on the basis of scientific considerations, such as the origin of the ridges, their composition, tectonic settings, etc.

For example, if the oceanic ridges include the first three types of ridges mentioned above (composed of oceanic basaltic rocks), one may find some examples where the ridges formed along transform faults or by later tectonic activity infringe the continental margin of continents.

Some ridges on the deep ocean floor (including active spreading ridges) may have islands on them. In such cases it would be impossible to consider that part of the ridge to belong to the deep ocean floor, and to fall under the category of oceanic ridges under article 76.

Therefore the Commission feels that for the purposes of the Convention the term "oceanic ridges" includes all ridges located on the deep ocean floor which do not have any connection with the continental margin as defined in accordance with article 76. That will satisfy the conditions of paragraph 3 of that article.

The submarine ridges mentioned in paragraph 6 of article 76 are the ridges which coalesce with the continental margin as defined in accordance with paragraph 3 or extend from that continental margin seaward towards the deep ocean floor. As it is difficult to define the details concerning various conditions, the Commission feels it appropriate that each case be examined based on data submitted by the coastal State.

In case of an island located on a ridge, the Commission feels that such an island should be considered as a land mass with the ridge in question being its submerged prolongation irrespective of the composition and the origin of the

ridge. In this case the ridge falls under the category of submarine ridges in accordance with paragraph 6 of article 76.

Paragraph 5 allows two options for defining the outer limits of the continental shelf drawn in accordance with paragraph 4 (a) (i) and (ii), either an outer limit of 350 M from the baselines, or an outer limit that is not to exceed 100 M from the 2,500 m isobath. Paragraph 6 states that on submarine ridges the second alternative is not permitted.

7.3. Submarine elevations

The term "submarine elevations" of paragraph 6 includes a selection of highs: "such as plateaux, rises, caps, banks and spurs". The phrase "such as" implies that the list is not complete. Common to all of these elevations is that they are natural components of the continental margin. This makes it relevant to consider the processes that form the continental margins and how continents grow. The growth of the present continents is and/or was primarily caused by geological processes along the continental margins (e.g., Rudnick 1995). Consequently, the Commission will base its views on "submarine elevations" mainly on the following considerations:

(a) In the active margins, a natural process by which a continent grows is the accretion of sediments and crustal material of oceanic, island arc or continental origin onto the continental margin. Therefore, any crustal fragment or sedimentary wedge that is accreted to the continental margin should be regarded as a natural component of that continental margin;

(b) In the passive margins, the natural process by which a continent breaks up prior to the separation by seafloor spreading involves thinning, extension and rifting of the continental crust and extensive intrusion of magma into and extensive extrusion of magma through that crust. This process adds to the growth of the continents. Therefore, seafloor highs that are formed by this breakup process should be regarded as natural components of the continental margin where such highs constitute an integral part of the prolongation of the land mass.

8. Delineation of the outer limits of the continental shelf based on sediment thickness

8.1. Formulation of the problem: paragraph 4 (a) (i)

8.2. Relevant geophysical techniques and data

8.3. Depth conversion and thickness determination

8.4. Sources and magnitudes of error

8.5. Selection of outermost fixed points of 1 per cent sediment thickness

8.1. Formulation of the problem: paragraph 4 (a) (i)

The Commission recognizes that the sediment thickness rule is one of two equally valid formulae for entitlement to the extended continental shelf and the delineation of its outer limits subject to the constraints contained in paragraphs 5 and 6. Paragraph 4 (a) (i) describes this formula as follows:

> "(i) a line delineated in accordance with paragraph 7 by reference to the outermost fixed points at each of which the thickness of sedimentary rocks is at least 1 per cent of the shortest distance from such point to the foot of the continental slope; or ..."

The sediment thickness formula opens an avenue for the admission of geophysical evidence in a submission of an extended continental shelf by a coastal State. It has the advantage of accounting for variations in continental rises throughout the world.

This formula is based on a model in which the sediments of the rise thin gradually in a seaward direction. This model links the outer limit of the rise to the thickness of the sediments beneath it (Gardiner, 1978).

A coastal State that intends to apply this provision will have to document the position of the foot of the continental slope and the thickness of sediments in a seaward direction from it. Geoscientists have long recognized that a series of technical issues arises during its implementation. These relate to the identification of the sediment/basement interface, the calculation of sediment thickness and the variability of sediment distribution.

In the ideal morphological model cf a passive continental margin, these sediments belong to the continental rise. The geology and morphology of active and sheared continental margins are more complex and usually lack the classical rise but may still comprise considerable volumes of sediments beyond the foot of the slope (cf. chapter 6).

The sediments of the classical rise and other sediment wedges adjacent to the foot of the slope may consist of material eroded from the adjacent continent and deposited by turbidity [currents] and contour currents. These sediments are mixed with pelagic and hemipelagic material and/or pyroclastics, such as ash and

lava. The sedimentary facies and morphology of the slope and rise are often severely modified by the slumping and redeposition of sediments.

The rise on a passive continental margin is ideally a wedge-shaped apron formed by sediments lying on oceanic and partly continental basements. The sediment thickness is expected to decrease gradually from the foot of the continental slope towards the abyssal plains of the deep ocean. The basement at the base of the sediments may have very variable dips, but in many cases has a gentle general dip towards the continent. However, for the purpose of implementing paragraph 4 (a) (i), the Commission understands the term "sediment thickness" in accordance with the following definition:

The sediment thickness at any location on the continental margin is the vertical distance from the sea floor to the top of the basement at the base of the sediments, regardless of the slope of the sea floor or the slope of the top basement surface.

The thickness of sediments can be determined by means of direct sampling and indirect methods. Direct sampling is conducted by means of drilling. This is a very costly process, particularly in deep water, and only gives spot values. Indirect methods include acoustic and potential field measurements. These are less expensive, more expeditious and give a better understanding of sediment distribution. However, they require additional information. The method of seismic profiling, for example, needs velocity calibration.

Paragraph 4 (a) (i) implies the determination of the sediment thickness by a measurement of the depth of the top of the basement from the seabed. This determination requires the application of methods to establish the position and shape of the seabed relative to the top of the basement. The most relevant combined data sets for these purposes are those derived from bathymetric and seismic reflection and refraction measurements. The calculation of the vertical distance between the basement and seabed surfaces (i.e., the sediment thickness) involves a conversion of the two-way travel times of the seismic wavelet into depth in metres.

In some cases, especially where seismic reflection data are of poor quality, gravimetric and magnetic data may also be relevant for mapping the top of the basement.

The Commission acknowledges that, for the coastal States located in the southern part of the Bay of Bengal, an exception to the provisions of paragraph 4 is provided for by the Statement of Understanding in Annex II of the Final Act of the Third United Nations Conference on the Law of the Sea.

8.2. Relevant geophysical techniques and data

The Commission will regard the data provided by seismic reflection and seismic refraction surveys as the primary source of evidence for mapping and determining the sediment thickness. Gravimetric and magnetic data may be provided at all times as complementary sources of evidence. These complementary forms of evidence are particularly relevant in instances where only a non-comprehensive seismic database may be available.

Seismic reflection data

A typical area of continental margin will generally have four different types of seismic reflection, data derived from:

(a) Regional government/academic/industry multi-channel seismic surveys for reconnaissance of the continental margin;

(b) Localized and detailed 2D and 3D surveys acquired predominantly on the shelf by the hydrocarbon industry;

(c) Localized 2D multi-channel surveys acquired by research institutions for the preparation of scientific drilling of the International Ocean Drilling Programme (ODP) on continental margins; and

(d) Widely spaced and scattered academic/oceanographic institution surveys, often only recorded by means of a single-channel technique.

Multi-channel reflection data form a much more comprehensive source of evidence than data collected by means of single-channel techniques. The overall greater quality and penetration of these multi-channel data offer many advantages for the delineation of the outer edge of the continental margin. Single-channel data are generally of a poorer quality, shallower and without velocity information. They are less valuable and often are very randomly distributed.

The Commission will regard multi-channel reflection data as the primary source of evidence for the determination of sediment thickness. Single-channel reflection data may also be provided at all times by coastal States as a complementary source of evidence.

The Commission is aware that single-channel data might be the only source of seismic reflection data available in some submissions. In these instances, all acoustic and potential field geophysical measurements available will have to be analysed by means of inverse theory techniques to help render the thickness of sediments in the outer parts of the continental margin.

Seismic refraction data

Seismic refraction methods, also referred to as wide-angle reflection methods, give information on the transmission velocities and the nature of the subsurface rock layers. The two main features of the wide-angle method are that:

(a) It employs rather low frequency sources; and

(b) The seismic rays are projected obliquely through the geological structures.

The low frequencies allow good penetration. The oblique angles allow the detection and measurement of velocity gradient zones as well as the more abrupt changes, which show up well on reflection profiles. In typical marine wide-

angle reflection surveys on continental margins, the recording stations (ocean bottom seismographs) are placed typically 5 km to 10 km apart, providing a corresponding moderate accuracy of the ray trace modelling solutions, velocity and depth estimates. Full details of the source of the data and the processing methods utilized are required in order to determine the validity of the interpretation presented.

Gravity

Geodetic measurements of the Earth's gravity field may provide evidence in support of a submission. Gravity data can be obtained from sea-floor gravity measurements (Beyer et al. 1966; Zumberge et al. 1994), surface marine gravity surveys (Torge, 1989) and airborne gravity surveys (LaCoste, 1967; Valliant et al., 1985). They can also be derived on a global basis from a combination of multi-satellite altimetry measurements and dynamic orbital analyses (Seeber, 1993). The combination of terrestrial and extraterrestrial gravity estimates, via inverse theory techniques, can provide important insights into the composition and structure of the continental margin, including the delineation of sedimentary basins, and the modelling of sediment thickness and deep crustal structures. Free air anomalies, in particular, may be used as a diagnosis element in order to outline the potential outer edge of the continental margin.

Magnetics

Magnetic data are particularly useful for distinguishing oceanic from continental crust since the magnetic stripes of the oceanic crust are unmistakable. These features led to the scientific breakthrough of the sea-floor spreading hypothesis. Similarly to satellite-derived gravity data, satellite-derived magnetic data can only produce intermediate- to long-wavelength anomaly maps. These satellite-derived magnetic data can be useful in regional compilations of marine magnetic data (Arkani-Hamed et al., 1995).

Again, individual marine magnetic profiles can be modelled to gain greater insight into the nature and depth of the oceanic and continental basements beneath the sediments.

Mapping the top of the sediments

Mapping the top of the sedimentary wedge of the rise is equivalent to mapping the seabed. Modern single-beam and multi-beam swath bathymetric technologies provide the most accurate depth measurements of the seabed (cf. chapter 4). However, this information is also collected as a by-product of seismic reflection surveys. This by-product information may be used to gain an understanding about bathymetry and morphology of the sea floor wherever hydrographic measurements are not available.

Seismic reflection-derived bathymetric information should be interpolated and calibrated with that provided by hydrographic surveys wherever possible. This correction is necessary in order to remove errors that arise owing to the lower resolution achieved as a result of the use of lower frequencies in seismic surveys.

The Commission will regard the data provided by hydrographic bathymetric surveys as the primary source of evidence for mapping the sea floor. Bathymetric-derived information from seismic reflection surveys may be provided at all times by coastal States as a complementary source of evidence in a submission. This complementary evidence is particularly relevant in instances where only a non-comprehensive bathymetric database may be available.

However, seismic reflection data have the advantage that the entire sedimentary wedge, from the top to the basement, may be interpreted in the same data set for the purpose of determining its thickness. And for this purpose the errors inherent to seismic-derived bathymetry are not significant.

Mapping the top of the basement

The basement of the sediment wedge can be oceanic, continental or a combination of both. In the simplest cases, the sediments of the rise rest on oceanic basement all the way from the foot of the continental slope. The oceanic basement generally forms at an oceanic spreading ridge and consists of a peridotitic and gabbroic root complex, an intermediate zone of basaltic dyke intrusions and a thick series of submarine basalt lavas on top. Normally, the formation of the oceanic crust at the spreading ridge is in the range of a few centimetres per year in an environment of moderate sediment input. This means it is possible to regard the top of the uppermost lava flow as the top of the basement.

In more complex cases, there may be a zone of stretched and thinned continental crystalline basement at the base of the sediment wedge proximal to the foot of the slope. The sediments in the wedge rest on a post-rift unconformity. If syn-rift or pre-rift sediments are preserved below the post-rift unconformity, these should be included in the sediment thickness estimation and the top of the basement should be regarded as the top of the crystalline basement below the pre- and syn-rift sediments.

The top of the oceanic and continental basements represents a sharp increase in seismic velocities and gives high acoustic impedance contrast relative to the overlying sediments. Much of the energy will be reflected from this surface, and the penetration of energy into the underlying basement is significantly reduced. This results in a very low signal-to-noise ratio of the energy reflected from within the basement, and the internal signature of the basement will be that of random noise. Hence, on a seismic reflection profile, the top of the basement will stand out as a prominent reflector between the well-defined reflectors of an overlying bedded sedimentary sequence and an underlying, high-velocity "noisy" section of the basement. In most cases this will be true where the top of the basement is not too deeply buried (less than ca. 5-6 km). However, in those areas where paragraph 4 (a) (i) applies, the total sediment thickness will usually be of the order of only 1 km to 2 km at the critical location of the outer limit line. In this way, seismic reflection data in most cases will be the best method of identifying the top of the basement in the most critical areas.

In areas of very large sediment thickness or where seismic signals from the top of the basement are masked by interbedded lava, one may resort to seismic

refraction methods to define the depth-to-top of the true basement. The identification of the top of the basement is then based on an interpretation of the velocity structure of the whole crust. An estimation of the depth-to-basement within an acceptable range of error requires a data set of good quality and reasonable resolution as well as some degree of calibration by reflection data and gravity modelling. Good-quality seismic refraction data may be acquired by modern ocean bottom seismograph (OBS) techniques. The 10 km spacing generally used between the sonobuoys may, however, prove to be too large to provide an acceptable range of error. Experiments show that a closer OBS spacing combined with seismic reflection data improves the resolution considerably (Mjelde et al., 1997).

Modelling based on a combination of gravity and magnetic data may also give an estimated depth-to-top of the basement in areas with thick sediment piles and no interbedded lava or intrusions. The range of error from this method is very large relative to the seismic methods. The error in the determination of the depth-to-top of the basement depends upon the quality of the magnetic data, the densities and susceptibilities used in the calculations and the relative position of the Moho. However, in areas with ice cover or very deep basements, modelling of a combination of a heterogenous gravity and a magnetic data set may be a valuable supplement to a sparse seismic database used in the mapping of the top of the basement.

Minimum data coverage

Article 76, paragraph 7, states that "the coastal State shall delineate the outer limits of its continental shelf ... by straight lines not exceeding 60 nautical miles in length, connecting fixed points ...". This requirement must be combined with the requirement of paragraph 4 (a) (i) that the sediment thickness at each of the fixed points shall be at least 1 per cent of the shortest distance to the foot of the slope.

The above requirement means that the minimum requirement is a data coverage that documents the required sediment thickness at fixed points at a spacing of maximum 60 M. In principle, the survey must be designed to prove the contiguity of the sediments from each selected fixed point to the foot of the slope (see section 8.5). One way to achieve the implied minimum standard is to select a series of well-documented geophysical profiles from the foot of the slope to their intersection with the claimed delineation line at a spacing of less than 60 M. The seismic lines therefore need to be a maximum of 60 M apart when planning a seismic survey for the purpose of delineating the outer limit of the continental shelf. However, this does not allow for any deviations in the straight-line segments. Thus, a closer line spacing may be considered in order to give more flexibility. The allowed deviation increases with a closer line spacing according to the approximate formula:

Line spacing in nautical miles = Cosine max. angle of deviation from orthogonal * 60 (see figure 8.1).

The 60 M maximum spacing requirement allows coastal States to bridge natural indentations in the sediment thickness rather than following the sometimes meandering path of the precisely measured feature. This may also

permit a less detailed sampling over the margin, with a possible reduction of the costs involved in the collection and interpretation of the data. However, it is evident that such a formal minimum data coverage [will certainly] could miss some [many] important details of the morphology of the outer limit of the continental margin, and the resulting 1 per cent line could [will] only be a rough approximation of the true geological limit. Coastal States that suspect that such an approximation will be to their disadvantage will benefit from executing more comprehensive and detailed surveys [data coverage and mapping]. In general, the data coverage should reflect the complexity of the outer margin.

8.3. Depth conversion and thickness determination

The estimation of sediment thickness requires the depth conversion of the interpreted profiles and maps. This depth conversion of the interpreted geophysical data should be documented by the relevant database and the description of the method applied.

Seismic velocity

Determination of sediment thickness from seismic profiles requires knowledge of the propagation velocity of the seismic signal through the sedimentary section. This velocity can be calculated during the processing of multi-channel seismic data, but owing to uncertainties involved in the procedure, inaccuracies in the calculated interval velocity, and therefore sediment thickness, could typically be 10 per cent.

The velocity of transmission of the acoustic wave through the sub-seabed layers is required not only to determine their thickness, but also to give an indication of the nature of the material. Lower velocities are generally associated with sedimentary material, whereas higher velocities are often associated with metamorphic, igneous or "basement" material. A distinct change in velocities may assist in identifying the base of the sedimentary section.

Velocities of the offshore sedimentary sequence can be obtained by the following methods:

(a) In situ velocity surveys carried out in boreholes;

(b) Measurement of velocity in cores drilled in the sedimentary section;

(c) Analyses of multi-channel seismic reflection data;

(d) Seismic refraction and wide-angle reflection data analysis.

In situ and core measurements are accurate, but rare, and are only locally significant.

In the case of seismic reflection data, the interval velocities are derived from seismic stacking velocities using the Dix equation.[1] Such results are extensive but inherently somewhat inaccurate and only valid to a depth that is related to the length of the receiver array, and are generally more accurate at shallower depths. The accuracy is also related to the geometry and altitude of the reflecting interfaces.

Analysis of seismic refraction and wide-angle reflection data can be used to obtain the velocities of the various major layers, but the derived velocities are averaged over the length of the refraction spread.

The sparsity of samples collected by the Deep Sea Drilling Project/Ocean Drilling Programme throughout the continental margins of the world, and the lack of full seismic refraction data coverage, point to the seismic velocity data as the most relevant source of information to be collected in order to develop velocity models in most cases.

The Commission regards the combined use of refraction and reflection seismic data as the primary source of evidence to estimate propagation velocities throughout the sedimentary wedge. Other forms of velocity estimation may also be provided at all times by coastal States as a complementary source of evidence.

Depth conversion of seismic data

Depth conversion of seismic data requires velocity data to build a velocity model for the sediment wedge. Such velocity models describe the vertical and/or the lateral variation in seismic propagation velocities within the sedimentary sequences.

All of the available velocity data need to be combined to generate the most comprehensive velocity model for the sedimentary sequence on the continental margin. This would generally be in the form of an interval velocity map/profile or a series of interval velocity maps/profiles, together with a listing of the seismic velocity data, including a brief description of how they were derived, where they apply and an estimate of their accuracy. Where the sedimentary sequence is thick and/or is well known, it may be appropriate to build a more complex multi-layer velocity model that deals separately with distinct sedimentary intervals.

The Commission recommends that the relative range of error inherent in the velocity analysis/velocity picks be presented by coastal States in areas where

---

[1] The Dix equation states that, for reflections from a sequence of flat, parallel layers, the velocity in the nth layer Vn (interval velocity) is given by:

Vn (square) = (Wn(square)*tn - Wn-1(square)*tn-1) / (tn - tn-1)

where W n-1 and Wn are the average velocities from the datum to reflectors above and below the layer and tn-1 and tn are reflction arrival times.

there are no borehole data for calibration of the Dix interval velocities with respect to real propagation velocities. This may be done by presenting the standard deviation (in Dix interval velocities) for each interval velocity applied in the velocity model.

The normal approach for depth conversion would be to multiply the previously derived time isopach map (or two-way time profile) for the total sediment thickness from the seabed to the top of the basement, with the velocity model to arrive at the total sediment thickness. Different outputs might be obtained in general as a result of this operation if the calculations are based on the product of point measurements, or instead the calculations are based on the product of the two contoured surfaces. The former method would seem preferable to the latter.

At the current state of software development, however, iterative ray-tracing simulation is becoming a real alternative in the depth conversion of seismic data (both seismic reflection and seismic refraction data). The application of this method has a real advantage in areas with complex structures and significant velocity anomalies.

The Commission will have to determine the weight it gives to the different types of evidence on a case-by-case basis. It will have to check whether errors have occurred in calculating the sedimentary thicknesses and, if so, whether they were attributable solely to the available velocity control or some other source. The Commission will also have to verify whether the sedimentary extrapolation has been applied correctly from the location of the foot of the slope.

Gravity and magnetic data

The inversion [depth conversion] of gravity and magnetic data is not as straightforward as that of seismic data. The existence, uniqueness and optimization of the solution must be analysed. The final output of this inversion is a physical model of the sedimentary wedge that fits all the observations in an optimal way. When the uncertainties in the resulting model are unacceptable, additional data are incorporated in an iterative process.

Whereas bathymetry plays an important role in the three-dimensional modelling of gravity data, the inversion of magnetic data into an analytical signal is essential to define the position of the magnetic source. The final output physical model from an inversion is often very sensitive to inaccuracies in the measured data. The quality of the data is of prime importance in order to ensure the reliability of depth conversion in potential field methods.

The depth data obtained from both gravimetric and magnetic methods should be documented with all the modelling parameters used and a description of the inverse methods applied as well as an assessment of the quality of the data involved in the determinations.

8.4. Sources and magnitudes of error

The two most important variables in the determination of sediment thickness are the depth estimates of the top of the basement and the velocity model used for the depth conversion of seismic data.

Depth estimate of the top of the basement

The top of the oceanic or continental crystalline basement is usually readily identified by a very clear reflector on seismic surveys, owing to its large impedance contrast, in areas where sediment cover is moderate (< 3-4 km). The possibility of selecting the wrong reflector in such areas is very low. Thus, the uncertainty in the definition of the top of the basement is also very low.

The definition of the top of the basement cannot rely on seismic reflection alone in ice-covered areas, or areas of interbedded lava flows that mask the seismic reflection from the basement surface. The application of additional geophysical techniques is necessary. The best supplementary and/or alternative method is probably provided by seismic refraction methods, and ocean bottom seismograph (OBS) methods in particular. In addition, interpretations of the velocity structure of the subsurface based on refraction seismic data are often constrained by gravity modelling of the density structure. The uncertainty in the definition of the top of the basement by refraction data is equal to the uncertainty in the depth conversion based on those data. The range of error in depth to the basement based on a modern OBS data set is typically of the order of 10-20 per cent even after the calibration by gravity modelling (Mjelde et al., 1997).

Depth conversion of seismic data

The magnitude of errors in the converted depth of an interpreted seismic section is directly proportional to the magnitude of errors in the velocity model applied in the conversion. The magnitude of errors in velocity models based on stacking velocities of seismic reflection data is typically 5-15 per cent, depending on the depth and dip of the reflectors interpreted, the quality of the velocity analysis and, to an extent, on the data processing. In general, the combination of shallow depths and good-quality velocity analysis results in small errors in depth estimates.

In an iterative ray-tracing process, the magnitude of error in depth estimates is a function of how close it is possible to fit the calculated to the observed travel times.

The Commission will require documentation of the expected ranges of error to be submitted by a coastal State along with the description of the conversion methods applied.

Propagation of thickness errors to position errors

The expected error in the estimated thickness propagates into errors in the position of the 1 per cent sediment line, regardless of the depth conversion method applied.

The 1993 study entitled Definition of the Continental Shelf (United Nations, 1993) briefly mentions the calculation of the magnitude of error in horizontal distance owing to error in the calculation of sediment thickness. The Commission proposes a more sophisticated method by applying the following formula, which also takes into account the slope of the seabed and the dip of the top surface of the basement:

$$DX = DY / \tan (0.57 + \theta) + \tan \alpha$$

where DX is the error in distance, DY is the error in thickness, θ is the angle of dip of the top of the basement, α is the slope of the sea floor and 0.57° is the angle between the top of the basement and the 1 per cent line (i.e., the line showing the thickness increasing by 1 per cent of the distance from the starting point). For the normal range in gradient of the rise (between 0.07° and 1.15°) and with a 0.2° dip of the top basement towards the continent, an error of ±100 m in thickness translates to between ±7 km and ±3 km error in distance. From figure 8.2 it can be seen that the error in distance decreases as the dip of the base of the sediments towards the foot of the continental slope increases (θ increases). The same effects appear when keeping the top of the basement fixed and imagining varying degrees of slopes of the ocean floor: steepening of the ocean floor leads to smaller ranges of error in distance (α increases).

8.5. Selection of outermost fixed points of 1 per cent sediment thickness

Paragraph 4 (a) (i) establishes the requirement of [The Commission requires the fixed points referred to in article 76, paragraph 7, to be picked at locations where the actual sediment thickness complies with the requirement of] a line delineated in accordance with paragraph 7 by reference to the outermost fixed points at each of which the thickness of sedimentary rocks is at least 1 per cent of the shortest distance from such point to the foot of the continental slope. This implies that the sediment thickness at each fixed point must be documented by data acquired at that location by either borehole, [or] seismic or other geophysical data. Locating the fixed points on the basis of an isopach map is not an acceptable procedure to the Commission since the interpolation inherent in the contouring introduces a new source of uncertainty and it is not strictly covered by paragraph 4 (a) (i).

A jagged sea-floor and/or basement surface may cause large local variations in sediment thickness. This is a typical feature of oceanic and rifted continental basements. In these cases, the sediments in the area of the outer limit of the continental margin may, over a relatively short distance, repeatedly vary from the required thickness to less than the required thickness. This bathymetric and geological scenario may then produce several locations where the requirement for a 1 per cent or greater sediment thickness is satisfied along the same profile.

The Commission is here guided by paragraph 4 (a) (i), which states that the line shall be delineated by reference to "the outermost fixed points at each of which the thickness of sedimentary rocks is at least 1 per cent ..." The Commission invokes a principle of continuity in the implementation of this provision to state that:

(a) To establish fixed points a coastal State may choose the outermost location where the 1 per cent or greater sediment thickness occurs within and below the same continuous sedimentary apron; and that

(b) For each of the fixed points chosen there is a reasonably simple path along which the sediment thickness is nowhere less than 1 per cent of the distance, from the fixed point to the foot of the continental slope.

Locating the fixed points based on a calculated distributed average sediment thickness is not regarded as an acceptable solution to the problem of a jagged topography.

Another aspect of paragraph 4 (a) (i) is the measurement of distance: "the outermost fixed points at each of which the thickness of sedimentary rocks is at least 1 per cent of the shortest distance from such point to the foot of the continental slope". By the "shortest distance" the Commission understands: the shortest distance measured along a geodesic on the surface of the ellipsoid associated to the geodetic reference system used by the coastal State in the submission.

Figure 8.1.
Different spacing of seismic lines and allowed deviations from the orthogonal.

LINE SPACING IN NAUTICAL MILES = COSiNE MAX ANGLE OF DEVIATION FROM ORTHOGONAL x 60n.m

Figure 8.2 The relationship between error in thickness and distance, the slope of the seabed and the dip of surface of the top of the basement, on applying the limit criteria of the 1 % thickness line (i.e., the line showing the thickness increasing by 1% of the distance from the starting point).

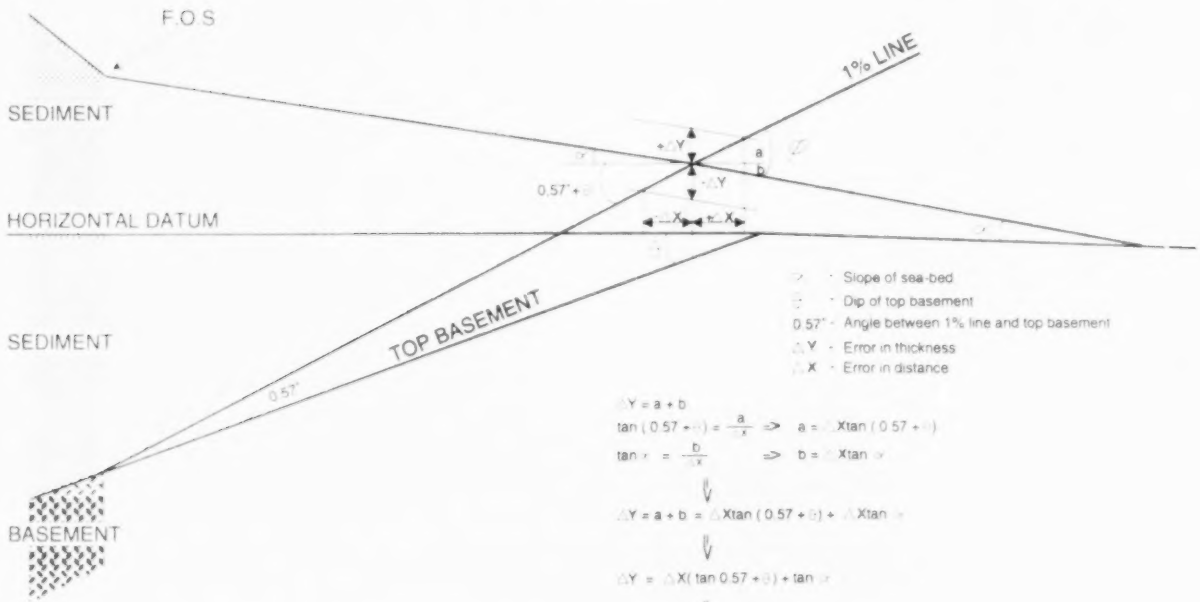

$$\Delta Y = a + b$$

$$\tan(0.57 + \beta) = \frac{a}{\Delta X} \Rightarrow a = \Delta X \tan(0.57 + \beta)$$

$$\tan \alpha = \frac{b}{\Delta X} \Rightarrow b = \Delta X \tan \alpha$$

$$\Downarrow$$

$$\Delta Y = a + b = \Delta X \tan(0.57 + \beta) + \Delta X \tan \alpha$$

$$\Downarrow$$

$$\Delta Y = \Delta X(\tan 0.57 + \beta) + \tan \alpha$$

$$\Downarrow$$

$$\Delta X = \frac{\Delta Y}{\tan(0.57 + \beta) + \tan \alpha}$$

/...

9. Information on the limits of the extended continental shelf

9.1. Formulation of the problem: paragraph 8 and Annex II

9.2. Bathymetric and geodetic data

9.3. Geophysical and geological data

9.4. Digital and non-digital data

9.5. Checklist of relevant supporting information and data

9.1. Formulation of the problem: paragraph 8 and Annex II

The Commission acknowledges that coastal States have an obligation to submit information on the limits of the extended continental shelf for the purpose of making recommendations. Paragraph 8 describes this obligation as follows:

> "Information on the limits of the continental shelf beyond 200 nautical miles from the baselines from which the breadth of the territorial sea is measured shall be submitted by the coastal State to the Commission on the Limits of the Continental Shelf set up under Annex II on the basis of geographical representation. The Commission shall make recommendations to coastal States on matters related to the establishment of the outer limits of their continental shelf. The limits of the shelf established by a coastal State on the basis of these recommendations shall be final and binding."

The Commission recognizes that one of its two functions prescribed in Annex II is to consider the data and material submitted by coastal States and to make recommendations in accordance with article 76 and the Statement of Understanding of 1980. Annex II, article 3 (1) (a), describes this function as follows:

> "1. The functions of the Commission shall be:
>
> (a) to consider the data and other material submitted by coastal States concerning the outer limits of the continental shelf in areas where those limits extend beyond 200 nautical miles, and to make recommendations in accordance with article 76 and the Statement of Understanding adopted on 29 August 1980 by the Third United Nations Conference on the Law of the Sea".

The submission will be divided in three separate parts in accordance with the Modus Operandi of the Commission (CLCS/L.3). The requested format contains an executive summary, a main body, and all supporting scientific and technical data.

["will" instead of "should" is used in the Modus Operandi. If changes are introduced in one then changes in the other follow as well: editor]

The executive summary will contain the following information:

(a) Charts at an appropriate scale and coordinates indicating the outer limits of the continental shelf and the relevant territorial sea baselines;

(b) Which provisions of article 76 are invoked to support the submission;

(c) The names of any Commission members who gave advice in the preparation of the submission; and

(d) Any disputes as referred to in rule 44 and annex I to the Rules of Procedure of the Commission.

The main body will contain a detailed description of the database [interpretation], maps, technical procedures and scientific methodologies applied in the implementation of article 76. References to the basic data will be documented at each relevant step.

The third part will contain a copy of all data referred to in the main body, which will be arranged in separate annexes. All data submitted by the coastal State in support of its submission will be considered by the Commission.

9.2. Bathymetric and geodetic data

Bathymetric data

The complete bathymetric database used in the preparation of a submission may only include a combination of:

(a) Single-beam sounding measurements;

(b) Multi-beam sounding measurements;

(c) Seismic reflection-derived bathymetric measurements;

(d) Bathymetric side-scan measurements; and

(e) Light detection and ranging (LIDAR) measurements.

This information will be included in the second and third parts of the submission. Whereas only a part of it may be needed in the main body, the full bathymetric database will be regarded as an essential component of the supporting scientific and technical data.

The complete bathymetric database used in the submission will be included by the coastal State in its third part as an annex. This information can be made available to the Commission in an analytical form as compilation charts depicting soundings or, whenever possible, in digital form in a Hydrographic Information System (HIS) database by means of coordinates of latitude, longitude and depth.

Bathymetric data should be processed as much as possible to represent the correct depth. Spurious depth measurements should have been edited out.

A full technical description of the bathymetric database will include the following information:

- Source of the data;
- Sounding survey techniques and their technical specifications;
- Geodetic positioning methods and reference system;
- Time and date of the survey;
- Corrections applied to the data for speed of sound in water, calibration and other; and
- A priori or a posteriori estimates of random and systematic errors.

The main body of the submission will include all the necessary cartographic products derived from the compiled bathymetric database. These cartographic products may include the following analytic or digital forms:

- Two-dimensional depth profiles;
- Three-dimensional bathymetric models; and
- Nautical charts and maps with contours.

Each cartographic product will be accompanied by a detailed description of the mathematical methodology and bathymetric data used to produce it. The Commission will pay particular attention to the transit from numeric soundings to analytic functions. The coastal State will be required to document the following information:

- Interpolation or approximation method;
- Density of measured bathymetric data; and
- Perceptual elements such as map projections, vertical and horizontal scales, contour intervals, units, colours and symbols.

Wherever the bathymetric information presented to the Commission may be a filtered or smoothed subset of the original data, a full description of the methodology employed to produce it will be reported by the coastal State.

Geodetic data

Coastal States will be requested to provide information about the geodetic reference system used in the submission. Coordinate transformation parameters from this system to ITRF94 or WGS84 (G873) will be requested whenever one of these systems adopted by the Commission is not used in a submission.

Geodetic information may need to be included about some baselines from which the breadth of the territorial sea is measured. This will be the case only for those baselines which define a line at a distance of 350 M, if this constraint is applied at all to define the outer limits of the continental shelf. The coastal State will be required to document the following information:

- Source of the data;
- Geodetic positioning technique and reference system;
- Corrections applied to the data;
- Geodetic definition in the case of straight or archipelagic baselines; and
- A priori or a posteriori estimates of random and systematic errors.

9.3. Geophysical and geological data

Seismic data

Seismic data may include both seismic reflection data and seismic wide-angle reflection/refraction data.

The submission ought to include a list of all seismic surveys used in relation to the submission. This should be supplemented with one or several maps showing the line coverage of each survey. Several surveys may be combined in one map as long as the individual colours of each survey would be helpful.

Navigation and data records should be annotated in the same units. Multi-channel seismic reflection lines are usually annotated in shot points, common depth points (CDPs) or both. These are not interchangeable, and should accordingly be labelled clearly.

Seismic lines must be tied to a navigation plot which is annotated in the same units as the seismic line (shot points, CDPs).

Multi-channel seismic data should be processed to at least the necessary level of quality to justify the particular approach used. A description of the acquisition parameters and the processing sequence should either appear on the individual seismic line or be included separately for each survey in the submission. This should also include information on the cruise or ship on which the data were collected and the dates of collection and of processing of the data. In addition, seismic lines should have a vertical scale in seconds, an indication of direction and an indication of horizontal scale.

Unmarked copies of the seismic lines are needed, together with the interpretation of the same lines, in order for the Commission to observe the details of the interpretation.

The format of analogue records is essentially the same as for digital seismic records. The records are often annotated with time-of-day, and navigation data with this annotation need to be provided. Vertical and horizontal scales should be noted, as well as an indication of the direction of the profile.

When seismic velocity data are used for depth conversion, these data should be submitted together with a description of how they were derived, where they apply and an estimate of their accuracy. This applies to both stacking velocities from multi-channel reflection seismic and interval velocities derived from wide-angle reflection/refraction seismic data. For the specific seismic lines that document the sediment thickness at the outermost fixed points of the outer limit line, the actual velocity analysis from the processing job should be submitted at least for a part of the line where it crosses the fixed points.

Gravity data

The complete gravity database used in the preparation of a submission may include a combination of:

- Marine, aerial and sea-bottom gravimeter measurements; and

- Gravity values derived from satellite altimetry and orbital analyses.

This information will be included in the second and third parts of the submission. Whereas only a part of it may be needed in the main body, the full gravity database will be regarded as an essential component of the supporting scientific and technical data.

The complete gravity database used in the submission will be included by the coastal State in its third part as an annex. This information can be made available to the Commission in an analytical form as compilation maps depicting observed values or, whenever possible, in digital form in a Geographic Information System (GIS) database by means of coordinates of latitude, longitude and gravity or gravity anomaly. The coastal State will be required to document the following information:

- Source of the data;

- Gravity meters and their technical specifications;

- Geodetic positioning methods;

- Time and date of the survey;

- Corrections applied to the data: tides, Eötvös and other; and

- A priori or a posteriori estimates of random and systematic errors.

The data should be accompanied by a description of the acquisition parameters (including track direction, elevation and position control),

correction procedures and a contoured anomaly map which also displays the actual data coverage.

Maps and profiles should be clearly marked with geographical coordinates and a reference to original data on which they are based (survey names).

Magnetic data

The complete magnetic database used in the preparation of a submission may include a combination of:

- Marine and aerial fluxgate and proton-precession magnetometer measurements; and

- Magnetic values derived from satellite observation campaigns.

Magnetic data may include data of varying vintages and acquisition methods (ship or airborne). A list of all magnetic surveys and their year of acquisition should be provided together with a map showing the outline of each separate survey.

The data should be accompanied by a description of the acquisition parameters (including track direction, elevation and position control), correction procedures and a contoured anomaly map which also displays the actual data coverage.

Geological data

In the case of evidence to the contrary, it is recommended, in addition to the information described in the checklist in section 9.5, to include the following data obtained from sampling and coring of crustal subcrops at the continental margin with information about the source of the data:

- Lithology;

- Radiometric/palaeontological/palaeomagnetic age dating;

- Geochemical-isotope geochemical results.

9.4. Digital and non-digital data

Profiles and cross-sections

All the above types of data may be converted into geological/geomorphologic profiles and cross-sections by interpretation of those data. Such profiles and cross-sections should be clearly marked with references to the specific data (seismic, gravity, magnetic or bathymetry) on which they are based (e.g., on a cross-section based on a seismic profile, the shot-point positions and the identification of the seismic line may be included along the base of the cross-section. If a cross-section consists of a combination of several segments of different seismic lines, each of the original segments should be labelled and the tie points between them indicated).

The geographical position of all profiles must be given, preferably on maps also showing the relevant geological/geomorphologic features. Vertical and horizontal scales should be noted, as well as an indication of the direction of the profile or cross-section. Vertical axis may be in time (milliseconds) or depth (metres).

In the case of depth sections based on seismic data, a description of the velocity data and the conversion method is requested.

In the case of crustal structure cross-sections based on gravity data, information on the densities and the calculation methods and software applied must be included.

Maps and charts

It is recommended that the geophysical and bathymetric data and their interpretation documenting the sediment thickness and the foot of the continental slope be presented as a series of charts, maps, profiles and other graphics.

The final graphics may vary greatly depending on the chosen vertical and horizontal scales, and the methods of interpolation, extrapolation, contouring and various types of digital processing. The Commission therefore requires due references to the original data and a description of the methods involved in order to verify the quality and reliability of a graphic presentation.

An important part of any submission should be a series of maps which ties all the data submitted into a common geographic frame of reference. It is reasonable to suggest that the scale and projection for all submitted maps or groups of maps (ships' tracks, bathymetry, sediment isopach maps, depth of basement, as well as other possible maps, such as magnetic anomaly maps, gravity maps or wide-angle reflection/refraction lines) should be the same. Every map should be supported by the database, preferably in digital form, from which it was derived.

Latitude and longitude should be clearly marked on maps. It should be clear whether the units are degrees/minutes or decimal degrees. Maps should be large enough so that details of the cruise tracks are visible and track annotations are legible.

In support of the executive summary to be submitted, it will be necessary to prepare a map of the outer limits of the continental shelf, indicating the criteria on which the submission is based. Such a map should be on a scale suitable to fit A4 size paper, and should cover the full extent of the continental shelf, up to its outer limit.

The coastal State can use the colour schemes, symbology and type of projection deemed adequate to the cartographic representation.

Maps, charts and databases submitted to the Commission must bear the authentication from the national agency of the respective coastal State which is legally authorized to certify its quality and reliability.

Digital data

The coastal State may use data collected with a range of techniques from a wide variety of sources in establishing the outer limits of the continental shelf. In recent years, however, most bathymetric and geophysical data have been captured, processed and stored in digital form. Therefore, the coastal State may find it convenient to submit much of its material in digital form.

The Secretariat has at its disposal a Geographic Information System (GIS), running on a PC, which can read data in database format. It also has current office software such as Microsoft Word and Excel. The data in ASCII format, fixed length or ASCII semi-colon (;) or tab delimited, can be easily converted.

The coastal State can submit digital data in any internationally recognized format. In this case, there are two possibilities:

(a) The Commission may request, as part of the submission, that the coastal State make available the facilities to handle the submitted digital data; and

(b) The coastal State may invite the subcommission,[4] or some of its members, to examine the submission at the lead technical agency for the coastal State. In this case, the coastal State will defray the expenses of the members of the subcommission.

9.5. Checklist of relevant supporting information and data

The submission in support of the outer limit of the continental shelf of a coastal State may include one of five possible cases at any point along the limiting line:

1: A line delineated at a distance of 60 M seaward from the foot of the continental slope (in accordance with article 76 (4) (a) (ii));

2: A line along which the sediment thickness is 1 per cent of the shortest distance from the foot of the slope (in accordance with article 76 (4) (a) (i));

The above-mentioned two lines are subject to the two constraints described in article 76 (5), namely those listed below as 3 and 4:

3: A line delineated at a distance of 350 M from the baselines;

4: A line delineated at a distance of 100 M from the 2,500-metre isobath;

5: A limit agreed to by States with opposite or adjacent coasts (in accordance with article 83).

---

[4] Under rule 40 of its Rules of Procedure (CLCS/3/Rev.2), the Commission shall establish a subcommission composed of seven members to examine each submission.

For each of these cases, the Commission may request that it be provided with the information indicated under the corresponding case code in the table below:

"Y" indicates that provision of this information is necessary for the Commission and the subcommission to discharge their responsibilities;

"R" indicates that provision of this information is recommended to assist the Commission and the subcommission in discharging their responsibilities.

Type of information to be submitted	Cases for which this information is to be submitted				
	1	2	3	4	5
Limit of overall continental shelf for coastal State (map)	Y	Y	Y	Y	Y
Limit of continental shelf for different parts of the margin (larger-scale maps)	Y	Y	Y	Y	Y
Criteria by which the limit is defined, each of the five criteria being indicated by a coded line (map)	Y	Y	Y	Y	Y
Baselines used in defining the limit if not shown on the limit maps (map)	-	-	Y	-	R
Baselines used for different parts of the margin (large-scale maps)	-	-	Y	-	R
200 M limit (map)	Y	Y	Y	Y	Y
350 M limit (map)	Y	Y	Y	Y	Y
Location of the foot of the continental slope (FCS), specifying how it was determined (map)	Y	Y	Y	Y	Y
Lines used to determine FCS (map), showing line identifier, navigation, shot points, etc., including the 60 M extension line	Y	Y	Y	Y	-

Type of information to be submitted	Cases for which this information is to be submitted				
	1	2	3	4	5
Lines used to define the 2,500-metre isobath (map), showing line identifier, navigation, shot points, etc., including the 100 M extension line	Y	Y	Y	Y	R
Bathymetric contour (map):					
- Where it identifies the 2,500-metre isobath	Y	Y	Y	Y	-
- Where not used as the basis for FCS	R	R	R	R	-
- Where used as the basis for FCS	Y	Y	Y	Y	-
FCS base points used for 60 M extrapolation (map)	Y	-	Y	Y	-
All bathymetric profiles (sections) annotated with locations of the determined FCS:					
- Where used as the basis for FCS	Y	Y	Y	Y	-
- Where not used	R	R	R	R	-
Bathymetric profiles annotated with the location of the determined FCS to indicate the character of the margin	R	R	R	R	-
Bathymetric survey parameters (table) keyed by cruise or line identifier showing reliability of FCS and 2,500-metre isobath, including sound velocity used and accuracy of location and velocity/depth profiles	Y	Y	Y	Y	-
Digital multi-channel seismic tracks (map) used in the determination of sediment thickness, including shot-point numbers and navigation	-	Y	-	-	-

Type of information to be submitted	Cases for which this information is to be submitted				
	1	2	3	4	5
Analog single-channel seismic tracks (map) used in determination of sediment thickness, including shot points and navigation	-	Y	-	-	-
FCS points used to derive the 1 per cent sediment thickness line (map)	-	Y	-	-	-
Seismic profiles (travel-time sections) used to determine sediment thickness (two copies: one original, one interpreted)	-	Y	-	-	-
Representative seismic profiles (travel-time sections) used to determine sediment thickness (two copies: one original, one interpreted) to indicate character of the margin	-	R	-	-	-
Travel-time difference between sea floor and the basement (map)					
- If 1 per cent points based on profiles	-	R	-	-	-
Sediment thickness (map) showing depth-converted versions of travel time difference maps					
- If 1 per cent points based on profiles	-	R	-	-	-
Survey parameters keyed to seismic profiles (table), including the acquisition method, time/depth conversion table/plot and accuracy indicators for location and velocity	-	Y	-	-	-
Velocity analysis (table) on which time/depth conversion was based	-	Y	-	-	-

Type of information to be submitted	Cases for which this information is to be submitted				
	1	2	3	4	5
Location of all data used as basis for velocity analysis (map), indicating whether refraction, ocean bottom seismometer, sonobuoy, borehole, wide-angle reflection or other method was used	-	Y	-	-	-
All depth-converted profiles (sections or horizontal plots) annotated to show sea floor, basement surface, FCS and 1 per cent points:					
- If 1 per cent points based on profiles	-	Y	-	-	-
Representative depth-converted profiles (sections or horizon plots) annotated to show sea floor, basement surface, FCS and 1 per cent points to indicate the character of the margin	-	R	-	-	-

10. References and Bibliography

Alexander, L.M. (1990). *Alternative Interpretations of Geographic Articles in the 1982 LOS Convention*. Center for Ocean Management Studies, Kingston, University of Rhode Island.

Allaby, A. and M. Allaby (1991) The Concise Oxford Dictionary of Earth Sciences, Oxford, Oxford University Press.

American Geological Institute (1976) Dictionary of Geological Terms. Garden City, New York, Anchor Press/Doubleday..

Appelbaum, L.T. (1982). Geodetic Datum Transformation by Multiple Regression Equations. *Proceedings of the Third International Geodetic Symposium on Satellite Doppler Positioning*, New Mexico State University, Las Cruces, New Mexico, 8-12 February, p. 207-223.

Arkani-Hamed, J.; J. Verhoef; W. Roest; R. Macnab (1995): The intermediate-wavelength magnetic anomaly maps of the North Atlantic Ocean derived from satellite and shipborne data. *Geophysical Journal International* 123, 727-743.

Bally, A.W. (ed.) (1988) Atlas of Seismic Stratigraphy. *AAPG Studies in Geology* Number 27, vol. 1 - 3, American Association of Petroleum Geologists.

Bell, T.H. (1979). Mesoscale sea floor roughness. *Deep-Sea Research* 26 (1A): 65-76.

Bennet, J.O. (1996). Mapping the Foot of the Continental Slope with Spline Smoothed Data Using the Second Derivative in the Gradient Direction. *Proceedings of the Second International Conference on Geodetic Aspects of the Law of the Sea*, Bali, Indonesia, 1-4 July, pp. 303-335.

Beyer, L.A., R.E. von Huene, T.H. McCullogh, and J.R. Lovett (1966). Measuring gravity on the sea floor in deep water. *Journal of Geophysical Research* 71: 2091-2100.

Boggs, S.W. (1930). Delimitation of the Territorial Sea: the Method of Delimitation Proposed by the Delegation of the United States at the Hague Conference for the Codification of International Law. *American Journal of International Law* 24 (3): 541-555.

Boucher. C., Z. Altamimi, M. Feissel and P. Sillard (1996). Results and Analysis of the ITRF94. International Earth Rotation Service. *IERS Technical Note 20*, Paris, Observatoire de Paris.

Boucher. C., Z. Altamimi and P. Sillard (1998). Results and Analysis of the ITRF94. International Earth Rotation Service. *IERS Technical Note 24*, Paris, Observatoire de Paris.

Bowring, B.R. (1985). The Geometry of the Loxodrome. *Canadian Surveyor* 39 (3): 223-230.

Bureau International des Poids et Mesures (1991). Le Système International d'Unités. Sèvres.

Carrera, G. (1992). An Iterative Method for the Investigation of Archipelagic Status. *Proceedings of the First International Conference on Geodetic Aspects of the Law of the Sea*, Bali, Indonesia, 8-11 June, p. 80-84.

Carrera, G.(1992). The Electronic Chart Display and Information System (ECDIS) and International Maritime Boundaries. *Proceedings of the First International Conference on Geodetic Aspects of the Law of the Sea*, Bali, Indonesia, 8-11 June.

Carrera, G. and R. Macnab (1996). Maritime Spaces in the Arctic Ocean: some hypothetical and not-so-hypothetical scenarios. Presentation in the Boundaries and Energy: Problems and Prospects Conference. International Boundaries Research Unit, Durham, United Kingdom, 18 July. Also in the

/...

Proceedings of the Second International Conference on Geodetic Aspects of the Law of the Sea, Bali, Indonesia, 1-4 July. p. 169-182.

Coffin, M.F. and O. Eldholm (eds.) (1991). Large Igneous Provinces: JOI/USSAC Workshop Report. The University of Texas at Austin for Geophysics, Technical Report No. 4

COSOD II (1987): Report of Second Conference of Scientific Ocean Drilling <COSOD II>. France, European Science Foundation (ESF). ISBN 2-903148-52-X.

Couper, A.D. (1989). The Time Atlas and Encyclopaedia of the Sea. . London, Times Books Limited.

Cunningham, J. and V.L. Curtis (1996). *WGS84 Coordinate Validation and Improvement for the NIMA and Air Force GPS Tracking Stations*. Dahlgren Division, Naval Surface Warfare Center, NSWCDD/TR-96/201, November.

Defense Mapping Agency (1984). Department of Defense World Geodetic System 1984: Its Definition and Relationships with Local Geodetic Systems. DMA Technical Report TR 8350.2, Second Edition (1991).

Edward, J.D. and P.A. Sangrossi (eds.) (1990). Divergent/Passive Margin Basins. AAPG Memoir 48, American Association of Petroleum Geologists. ISBN 0-89181-326-0.

Fox, C.G. and D.E. Hayes (1985). Quantitative methods for analyzing the roughness of the seafloor. *Reviews of Geophysics* 23 (1): 1-48.

Gardiner, P.R. (1978). Reasons and methods for fixing the outer limit of the legal continental shelf beyond 200 nautical miles. *Revue iranienne des relations internationales* (Teheran), Nos. 11-12, 145-170.

Gidel, G.C. (1932). *Le droit international de la mer*, Vol. 3, p. 510.

Harsson, B.G. (1992). Baseline determination: Experiences in Norway. *Proceedings of the First International Conference on Geodetic Aspects of the Law of the Sea*, Bali, Indonesia, 8-11 June, pp. 31-33.

Hedberg, H.D. (1976). Relation of Political Boundaries on the Ocean Floor to the Continental Margin. *Virginia Journal of International Law* 17 (1): 57-75.

Herzfeld, U.C. (1993). A Method for Seafloor Classification Using Directional Variograms, Demonstrated for Data from the Western Flank of the Mid-Atlantic Ridge. *Mathematical Geology* 25 (7): 901-924.

Hinz, K.(1981). A Hypothesis on Terrestrial Catastrophies: Wedges of very thick oceanward dipping layers beneath Passive Continental Margins. Geol. Jahrbuch, Reihe E, H.22: 3 - 23.

International Hydrographic Organization (1993). Specifications for Chart content and display aspects of ECDIS. Third Edition. International Hydrographic Bureau, Special Publication No. 52, Monaco.

International Hydrographic Organization (1998). IHO Standards for Hydrographic Surveys. Fourth Edition. Special Publication No. 44, Monaco.

Kumar, M. (1992). Use of World Geodetic System 1984 as a Global Reference. *Proceedings of the First International Conference on Geodetic Aspects of the Law of the Sea*, Bali, Indonesia, 8-11 June, p. 106-115.

LaCoste, L.J.B. (1967). Measurement of gravity at sea and in the air. *Reviews of Geophysics* 5, 477-526.

Lapidus, D.F. (1990) Collins Dictionary of Geology. London, Harper Collins.

Malys, S. and J.A. Slater (1994). Maintenance and Enhancement of the World Geodetic System 1980. *Proceedings of ION GPS-94*, 7th International

Technical Meeting of the Satellite Division of the Institute of Navigation, Salt Lake City, Utah, pp. 17-24.

Malys, S., J.A. Slater, R.W. Smith, L.E. Kunz and Kenyon, S.C. (1997). Refinements to the World Geodetic System 1984. *Proceedings of ION GPS-97*, 10th International Technical Meeting of the Satellite Division of the Institute of Navigation, Kansas City, Missouri, p. 841- 850.

Mandelbrot, B. (1977). Fractals: Form, Chance, and Dimension. San Francisco, W.H. Freeman.

McCarthy, D.D. (ed.) (1996). IERS Conventions (1996). International Earth Rotation Service. *IERS Technical Note 21*, Paris, Observatoire de Paris.

Macnab, R., M. Sorokin, R. Jackson and Y.Kazmin (1996). Submerged Prolongations of the Continental Margin beyond 200 Nautical Miles in the Arctic Ocean : Implications for Article 76 Implementations. *Proceedings of the Second International Conference on Geodetic Aspects of the Law of the Sea*, Bali, Indonesia, 1-4 July, p. 365-376.

Mjelde, R., S. Kodaira, P. Digranes, H. Shimamura, T. Kanazawa, H. Shiobara, E.W. Berg and O. Riise (1997). Comparison between a Regional and Semi-regional Crustal OBS Model in the Vøring Basin, Mid-Norway Margin. *Pure and Applied Geophysics* 149: 641-665.

Moritz, H. (1984). Geodetic Reference System 1980. *Bulletin Géodésique* Vol. 58, No. 3: 388-398.

Neilan, R.E., J.F. Zumberge, G. Beutler, and J. Kouba (1997). The International GPS Service: A Global Resource for GPS Applications and Research. *Proceedings of ION GPS-97*, 10th International Technical Meeting of the Satellite Division of the Institute of Navigation, Kansas City, Missouri, p. 883-889.

Nordquist, M.H. (Editor-in-Chief) (1985-1993). United Nations Convention on the Law of the Sea 1982: A Commentary. Volume I: Text of Convention and Introductory Material. Nordquist, M.H. (ed.); Volume II: Second Committee: Articles 1 to 85. Annexes I and II, and Final Act, Annex II. Nandan, S.N., S. Rosenne and N.R. Grandy (eds.); Volume III: Second Committee: Articles 86 to 132, and supplementary documents. Nandan, S.N., S. Rosenne and N.R. Grandy (eds.); Volume IV: Third Committee: Articles 192 to 278, and Final Act, Annex VI. Rosenne, S. and A. Yankov (eds.); Volume V: Settlement of Disputes, General and Final Provisions: Articles 279 to 320, Annexes V, VI, VII, VIII and IX, and Final Act, Annex I, Resolutions I, III, and IV. Rosenne, S. and L.B. Sohn (eds.). Dordrecht, Martinus Nijhoff.

Ocean Drilling program (ODP)/JOIDES (1996). Understanding our dynamic earth through ocean drilling. Ocean Drilling Program Long Range Plan. Washington D.C., Joint Oceanographic Institutions, Inc.

Ou, Z. and P. Vanícek (1996). Automatic Tracing of the Foot of the Continental Slope. *Marine Geodesy* 19, (2): 181-195.

Ou, Z. and P. Vanícek (1996). The Effect of Data Density on the Accuracy of Foot-line Determination through Maximum Curvature Surface by Automatic Ridge-tracing Algorithm. *International Hydrographic Review* LXXIII (2): 27-38.

Oxman, B.H. (1969). The preparation of Article 1 of the convention on the continental shelf. Prepared for Commission on Marine Science, Engineering and Resources. Springfield, Virginia, National Technical Information Service.

Price, W.F. (1986). The New Definition of the Metre. *Survey Review* 28 (219): 276-279.

Quine, W.V. (1966). Methods of Logic. Revised Edition. Holt, Rinehart and Winston.

Rudnick, R.F. (1995) Making continental crust. *Nature*, vol. 378: 571-578.

Schnadelbach, K. (1974). Entwicklungstendenzen in Rechenverfahren der mathematischen Geodäsie. *Zeitschrift für Vermessungswesen* 99: 421-430.

Seeber, G. (1993). Satellite Geodesy. New York, Walter de Gruyter.

Shalowitz, A.L. (1962). Shore and Sea Boundaries: with Special Reference to the Interpretation and Use of Coast and Geodetic Survey Data. Volume 1, Boundary Problems Associated with the Submerged Lands Cases and the Submerged Lands Acts. Washington, D.C., U.S. Department of Commerce, Coast and Geodetic Survey.

Sjoberg, L. (1996). Error propagation in maritime delimitation. *Proceedings of the Second International Conference on Geodetic Aspects of the Law of the Sea*, Bali, Indonesia, 1-4 July, pp. 153-168.

Stewart, W.K., Marra, M. and M. Jiang (1992). A Hierarchical Approach to Seafloor Classification Using Neural Networks. *Proceedings of the IEEE Oceans 92 Conference*, Honolulu, Hawaii, p. 109-113.

Swift, E.R. (1994). Improved WGS84 Coordinates for the DMA and Air Force GPS Tracking Sites. *Proceedings of ION GPS-94*, 7th International Technical Meeting of the Satellite Division of the Institute of Navigation, Salt Lake City, Utah, p. 285 - 292.

Taylor, B. and Natland, J.H. (eds.) (1995). Active Margins and Marginal Basins of the Western Pacific.Geophys. Monograph, Vol. 88.

Torge, W.(1989). Gravimetry. New York, Walter de Gruyter.

United Nations (1983). Office for Ocean Affairs and the Law of the Sea. The Law of the Sea. United Nations Convention on the Law of the Sea with Index and Final Act of the Third United Nations Conference on the Law of the Sea. (A/Conf.62/122). Sales No. E.83.V5.

United Nations (1987). Office of Legal Affairs: Division for Ocean Affairs and the Law of the Sea. The Law of the Sea. Official Texts of the United Nations Convention on the Law of the Sea of 10 December 1982 and of the Agreement relating to the Implementation of Part XI of the United Nations Convention on the Law of the Sea of 10 December 1982 with Index and excerpts from the Final Act of the Third United Nations Conference on the Law of the Sea. Sales No. E.97.V.10.

United Nations (1989). Office for Ocean Affairs and the Law of the Sea. The Law of the Sea. Baselines: National Legislation with Illustrative Maps. Sales No. E.89.V.10..

United Nations (1993). Office of Legal Affairs: Division for Ocean Affairs and the Law of the Sea. The Law of the Sea. Definition of the Continental Shelf. Sales No. E.93.V.16.

United Nations (1996). Office of Legal Affairs: Division for Ocean Affairs and the Law of the Sea. Commission on the Limits of the Continental Shelf: its functions and scientific and technical needs in assessing the submission of a coastal State. 10 June 1996 (SPLOS/CLCS/INF/1).

United Nations (1998). Commission on the Limits of the Continental Shelf. Rules of Procedure of the Commission on the Limits of the Continental Shelf. 4 September 1998. (CLCS/3/Rev.2)

Valliant, H.D., Halpenny, J., and Cooper, R.V. (1985). A microprocessor-based controller and data acquisition system for LaCoste and Romberg air-sea meters. *Geophysics* 50: 840-845.

Vanícek, P. (ed.) (1990). Geodetic Commentary to TALOS Manual. Appendix to Special Publication No. 51. Monaco, International Hydrographic Bureau.

Vanícek, P. (1992). The problem of a maritime boundary involving two horizontal geodetic datums. *Proceedings of the First International Conference on Geodetic Aspects of the Law of the Sea*, Bali, Indonesia, 8-11 June, p. 97-105.

Vanícek, P. and E. Krakiwsky (1982). Geodesy: The Concepts. Second Edition, Amsterdam, Elsevier, 1992.

Vanícek, P. and Z. Ou (1996). Automatic tracing of continental slope foot-line from real bathymetric data. *Proceedings of the Second International Conference on Geodetic Aspects of the Law of the Sea*, Bali, Indonesia, 1-4 July, p. 267-302.

von Rad, U., K. Hinz, M. Sarntheim and G. Seibold (eds.) (1982). Geology of the Northwest African Continental Margin. Berlin, Heidelberg, New York, Springer Verlag.

Wiseman, J.D.H. and C.D. Ovey (1953). Definitions of Features on the Deep Sea Floor. *Deep-Sea Research* 1 (1): 11-16.

Zumberge, M.A., E.L. Canuteson and J.A. Hildebrand (1994). The utility of absolute gravity measurements on the sea floor, *Proceedings of the International Symposium on Marine Positioning, INSMAP 94*, University of Hannover, Hannover, Germany, 19-23 September, p. 87-94.

Annex

LIST OF INTERNATIONAL ORGANIZATIONS

The list provided below is a non-exhaustive compilation of the names and World Wide Web sites of international organizations which might have access to data and information of potential interest to coastal States during the preparation of submissions in respect of the outer limits of their continental shelf beyond 200 nautical miles. The Commission includes the names of these organizations in an attempt to foster international scientific cooperation. The list is not intended to identify the names of international organizations with which the Commission may cooperate with a view to exchanging scientific and technical information which might be of assistance in discharging its responsibilities according to Annex II, article 3, paragraph 2.

The list is arranged under five main sections. The first contains specialized agencies of the United Nations system. The second names other scientific bodies of the United Nations. The third section includes the names of relevant international members, scientific associates and other bodies of the International Council of Scientific Unions (ICSU), a Formal Associate of the United Nations Educational, Scientific and Cultural Organization (UNESCO) since 1995. The fourth section contains the names of ongoing international scientific programmes conducted by a number of organizations whose data and research might prove valuable to coastal States. The last section includes the names of regional organizations and programmes.

Whereas the following international organizations have the responsibility of promoting the development of knowledge and research in their respective disciplines, according to Annex II, the Commission has the sole responsibility of making recommendations and providing scientific and technical advice in relation to submissions of limits of the extended continental shelf made by coastal States.

1. Specialized agencies of the United Nations system

1.1 International Maritime Organization (IMO)
http://www.imo.org/imo/

1.2 United Nations Educational, Scientific and Cultural Organization (UNESCO)
http://www.unesco.org/

1.2.1 Intergovernmental Oceanographic Commission (IOC)
http://www.unesco.org/ioc/

Committee on International Oceanographic Data and Information Exchange (IODE)
http://www.unesco.org/ioc/oceserv/iode/iodehome.htm

Consultative Group on Ocean Mapping (COM)
http://www.unesco.org/ioc/ocesci/ocemap.htm

Global Ocean Observing System (GOOS)
http://ioc.unesco.org/goos/

Joint IOC-IHO Guiding Committee for the General Bathymetric Chart of the Oceans (GEBCO)
http://www.nbi.ac.uk/bodc/gebco/html

2. Other United Nations bodies

2.1 Coordinating Committee for Coastal and Offshore Geoscience Programmes in East and Southeast Asia (CCOP)
ccopts@ccop.or.th

2.2 Intersecretariat Committee on Scientific Programmes relating to Oceanography (ICSPRO)
http://www.un.org/Depts/los/loscord.htm#ICSPRO

3. International Council of Scientific Unions (ICSU)
http://www.lmcp.jussieu.fr/icsu/

Members:

3.1 International Geographical Union (IGU)
http://www.helsinki.fi/science/igu/

Commission on Marine Geography
http://www.helsinki.fi/science/igu/html/commissions_list_13.html

3.2 International Union of Geodesy and Geophysics (IUGG)
http://www.omp.obs-mip.fr/uggi/

3.2.1 International Association of Geodesy (IAG)
http://www.gfy.ku.dk/~iag/

Committee on Geodetic Aspects of the Law of the Sea (GALOS)
http://www.unb.ca/GGE/GALOS/GALOS.HTM

3.2.2 International Association of Physical Sciences of the Oceans (IAPSO)
http://www.olympus.net/IAPSO/

3.3 International Union of Geological Sciences (IUGS)
http://www.iugs.org/

Working Group on Marine Geology
http://www.iugs.org/iugs/science/sci-wmg.htm

Scientific associates:

3.4 Fédération International des Géometres (FIG)
http://www.ddl.org/figtree/

Commission 4 Hydrography
http://csx.cciw.ca/dfo/chs/fig4/fig-home.html

3.5 International Cartographic Association (ICA)
http://www.msu.edu/~olsonj/ica/

Working Group on Marine Cartography
http://www.msu.edu/~olsonj/ica/

Working Group on Map Generalization
http://www.geo.unizh.ch/ICA-bin/index.html

3.6 International Hydrographic Organization (IHO)
http://iho.shom.fr/

International Data Center for Digital Bathymetry (IHO DCDB)
http://www.ngdc.noaa.gov/mgg/bathymetry/iho.html

Advisory Board on Hydrographic and Geodetic Aspects of the Law of the Sea (ABLOS) with the International Association of Geodesy (IAG)

3.7 International Society for Photogrammetry and Remote Sensing (ISPRS)
http://www.geod.ethz.ch/isprs/

Interdisciplinary bodies:

3.8 International Arctic Science Committee (IASC)
http://www.npolar.no/iasc/

3.9 Scientific Committee on Antarctic Research (SCAR)
http://www.lmcp.jussieu.fr/icsu/Structure/scar.html

3.10 Scientific Council on Oceanic Research (SCOR)
http://www.jhu.edu/~scor/

Permanent services and panels:

3.11 Federation of Astronomical and Geophysical Data Analysis Services (FAGS)
http://www-gik.bau-verm.uni-karlsruhe.de/~fags/

3.11.1 Bureau Gravimétrique International (BGI)
http://www-projet.cnes.fr:8110/

3.11.2 International GPS Service
http://igscb.jpl.nasa.gov/

3.12 Panel on World Data Centres (WDC)
http://www.ngdc.noaa.gov/wdc/wdcmain.html#wdc

3.12.1 WDC-A for Solid Earth Geophysics
http://www.ngdc.noaa.gov/seg/wdca/

3.12.2 WDC-A Oceanography
http://www.nodc.noaa.gov/NODC-wdca.html

3.12.3 WDC-B Marine Geology and Geophysics
http://www.sea.ru/cmgd/wdc.html

3.12.4 WDC-B Oceanography
http://www.wdcb.rssi.ru/WDCB/wdcb_oce.html

Inter-Union Commissions:

3.13 Inter-Union Commission on the Lithosphere (ICSU-IUGG-IUGS)
http://www.iugs.org/iugs/science/sci-icl.htm

4. International scientific programmes

4.1 International Geological Correlation Programmes
http://www.unesco.org/general/eng/programmes/science/programme/environ/igcp/index.html

4.2 International Lithosphere Programme
http://www.gfz-potsdam.de/pb4/ilp/

4.3 Ocean Drilling Program (ODP)
http://www.odp.tamu.edu/

5. Regional organizations and programmes

5.1 South Pacific Applied Geoscience Commission
http://www.sopac.org.fj/